OM-1330 220 237B
September 2004

Processes

MIG (GMAW) Welding

Flux Cored (FCAW) Welding

Description

Arc Welding Power Source
and Wire Feeder

Millermatic® DVI
And M-10 Gun

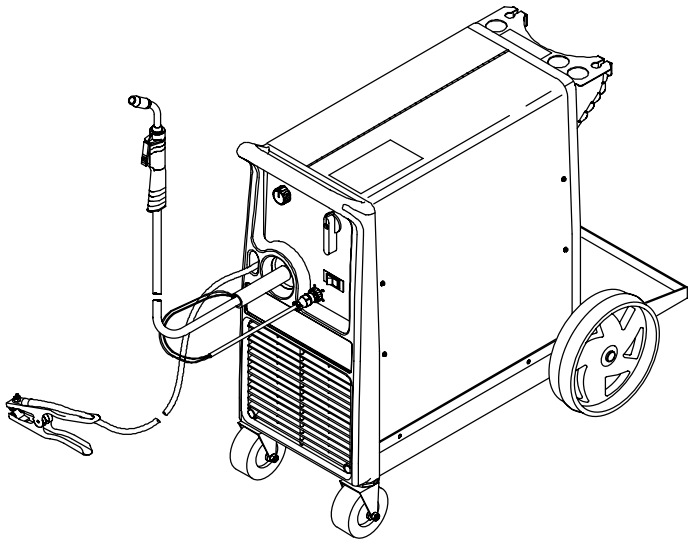

OWNER'S MANUAL

Visit our website at
www.MillerWelds.com

From Miller to You

Thank you and *congratulations* on choosing Miller. Now you can get the job done and get it done right. We know you don't have time to do it any other way.

That's why when Niels Miller first started building arc welders in 1929, he made sure his products offered long-lasting value and superior quality. Like you, his customers couldn't afford anything less. Miller products had to be more than the best they could be. They had to be the best you could buy.

Today, the people that build and sell Miller products continue the tradition. They're just as committed to providing equipment and service that meets the high standards of quality and value established in 1929.

This Owner's Manual is designed to help you get the most out of your Miller products. Please take time to read the Safety precautions. They will help you protect yourself against potential hazards on the worksite.

ISO 9001:2000 REGISTERED QUALITY SYSTEM

Miller is the first welding equipment manufacturer in the U.S.A. to be registered to the ISO 9001:2000 Quality System Standard.

We've made installation and operation quick and easy. With Miller you can count on years of reliable service with proper maintenance. And if for some reason the unit needs repair, there's a Troubleshooting section that will help you figure out what the problem is. The parts list will then help you to decide the exact part you may need to fix the problem. Warranty and service information for your particular model are also provided.

Miller Electric manufactures a full line of welders and welding related equipment. For information on other quality Miller products, contact your local Miller distributor to receive the latest full line catalog or individual catalog sheets. **To locate your nearest distributor or service agency call 1-800-4-A-Miller, or visit us at www.MillerWelds.com on the web.**

TRUE BLUE® WARRANTY

Working as hard as you do – every power source from Miller is backed by the most hassle-free warranty in the business.

Miller®

TABLE OF CONTENTS

SECTION 1 – SAFETY PRECAUTIONS - READ BEFORE USING 1
1-1. Symbol Usage 1
1-2. Arc Welding Hazards 1
1-3. Additional Symbols For Installation, Operation, And Maintenance 3
1-4. California Proposition 65 Warnings 3
1-5. Principal Safety Standards 4
1-6. EMF Information 4
SECTION 2 – CONSIGNES DE SÉCURITÉ – À LIRE AVANT UTILISATION 5
2-1. Signification des symboles 5
2-2. Dangers relatifs au soudage à l'arc 5
2-3. Autres symboles relatifs à l'installation, au fonctionnement et à l'entretien de l'appareil. 7
2-4. Principales normes de sécurité 8
2-5. Information sur les champs électromagnétiques 8
SECTION 3 – DEFINITIONS 9
3-1. Symbols And Definitions 9
SECTION 4 – INSTALLATION 9
4-1. Specifications 9
4-2. Duty Cycle And Overheating 10
4-3. Volt-Ampere Curves 11
4-4. MIG Welding Gun Duty Cycle And Overheating 11
4-5. Installing Work Clamp 12
4-6. Installing Welding Gun 12
4-7. Setting Gun Polarity For Wire Type 12
4-8. Installing Gas Supply 13
4-9. Installing MIG Wire Spool and Adjusting Hub Tension 14
4-10. Input Power For 230 VAC 15
4-11. Electrical Service Guide For 230 VAC 15
4-12. Extension Cord Data 15
4-13. Selecting A Location And Connecting Input Power 16
4-14. Threading Welding Wire 17
4-15. Installing Diverter Valve And Switch For Optional Spool Gun 18
4-16. Connecting An Optional Spool Gun 19
SECTION 5 – OPERATION 20
5-1. Controls 20
5-2. Weld Parameter Chart 22
SECTION 6 – MAINTENANCE &TROUBLESHOOTING 24
6-1. Routine Maintenance 24
6-2. Circuit Breaker CB1 24
6-3. Unit Overload 25
6-4. Replacing Gun Contact Tip 25
6-5. Changing Drive Roll and Wire Inlet Guide 25
6-6. Aligning Drive Rolls and Wire Guide 26
6-7. Removing Knob From Front Panel 26
6-8. Cleaning Or Replacing Gun Liner 27
6-9. Replacing Switch And/Or Head Tube 28
6-10. Troubleshooting 29
SECTION 7 – ELECTRICAL DIAGRAM 30

TABLE OF CONTENTS

SECTION 8 – MIG WELDING (GMAW) GUIDELINES 32
8-1. Typical MIG Process Connections 32
8-2. Typical MIG Process Control Settings 33
8-3. Holding And Positioning Welding Gun 34
8-4. Conditions That Affect Weld Bead Shape 35
8-5. Gun Movement During Welding 36
8-6. Poor Weld Bead Characteristics 36
8-7. Good Weld Bead Characteristics 36
8-8. Troubleshooting – Excessive Spatter 37
8-9. Troubleshooting – Porosity 37
8-10. Troubleshooting – Excessive Penetration 37
8-11. Troubleshooting – Lack Of Penetration 38
8-12. Troubleshooting – Incomplete Fusion 38
8-13. Troubleshooting – Burn-Through 38
8-14. Troubleshooting – Waviness Of Bead 39
8-15. Troubleshooting – Distortion 39
8-16. Common MIG Shielding Gases 40
8-17. Troubleshooting Guide For Semiautomatic Welding Equipment 40
SECTION 9 – PARTS LIST 42
WARRANTY

SECTION 1 – SAFETY PRECAUTIONS - READ BEFORE USING

som _8/03

1-1. Symbol Usage

Means Warning! Watch Out! There are possible hazards with this procedure! The possible hazards are shown in the adjoining symbols.

▲ **Marks a special safety message.**

☞ *Means "Note"; not safety related.*

This group of symbols means Warning! Watch Out! possible ELECTRIC SHOCK, MOVING PARTS, and HOT PARTS hazards. Consult symbols and related instructions below for necessary actions to avoid the hazards.

1-2. Arc Welding Hazards

▲ **The symbols shown below are used throughout this manual to call attention to and identify possible hazards. When you see the symbol, watch out, and follow the related instructions to avoid the hazard. The safety information given below is only a summary of the more complete safety information found in the Safety Standards listed in Section 1-5. Read and follow all Safety Standards.**

▲ **Only qualified persons should install, operate, maintain, and repair this unit.**

▲ **During operation, keep everybody, especially children, away.**

ELECTRIC SHOCK can kill.

Touching live electrical parts can cause fatal shocks or severe burns. The electrode and work circuit is electrically live whenever the output is on. The input power circuit and machine internal circuits are also live when power is on. In semiautomatic or automatic wire welding, the wire, wire reel, drive roll housing, and all metal parts touching the welding wire are electrically live. Incorrectly installed or improperly grounded equipment is a hazard.

- Do not touch live electrical parts.
- Wear dry, hole-free insulating gloves and body protection.
- Insulate yourself from work and ground using dry insulating mats or covers big enough to prevent any physical contact with the work or ground.
- Do not use AC output in damp areas, if movement is confined, or if there is a danger of falling.
- Use AC output ONLY if required for the welding process.
- If AC output is required, use remote output control if present on unit.
- Disconnect input power or stop engine before installing or servicing this equipment. Lockout/tagout input power according to OSHA 29 CFR 1910.147 (see Safety Standards).
- Properly install and ground this equipment according to its Owner's Manual and national, state, and local codes.
- Always verify the supply ground – check and be sure that input power cord ground wire is properly connected to ground terminal in disconnect box or that cord plug is connected to a properly grounded receptacle outlet.
- When making input connections, attach proper grounding conductor first – double-check connections.
- Frequently inspect input power cord for damage or bare wiring – replace cord immediately if damaged – bare wiring can kill.
- Turn off all equipment when not in use.
- Do not use worn, damaged, undersized, or poorly spliced cables.
- Do not drape cables over your body.
- If earth grounding of the workpiece is required, ground it directly with a separate cable.
- Do not touch electrode if you are in contact with the work, ground, or another electrode from a different machine.
- Use only well-maintained equipment. Repair or replace damaged parts at once. Maintain unit according to manual.
- Wear a safety harness if working above floor level.
- Keep all panels and covers securely in place.
- Clamp work cable with good metal-to-metal contact to workpiece or worktable as near the weld as practical.
- Insulate work clamp when not connected to workpiece to prevent contact with any metal object.
- Do not connect more than one electrode or work cable to any single weld output terminal.

SIGNIFICANT DC VOLTAGE exists after removal of input power on inverters.

- Turn Off inverter, disconnect input power, and discharge input capacitors according to instructions in Maintenance Section before touching any parts.

FUMES AND GASES can be hazardous.

Welding produces fumes and gases. Breathing these fumes and gases can be hazardous to your health.

- Keep your head out of the fumes. Do not breathe the fumes.
- If inside, ventilate the area and/or use exhaust at the arc to remove welding fumes and gases.
- If ventilation is poor, use an approved air-supplied respirator.
- Read the Material Safety Data Sheets (MSDSs) and the manufacturer's instructions for metals, consumables, coatings, cleaners, and degreasers.
- Work in a confined space only if it is well ventilated, or while wearing an air-supplied respirator. Always have a trained watch-person nearby. Welding fumes and gases can displace air and lower the oxygen level causing injury or death. Be sure the breathing air is safe.
- Do not weld in locations near degreasing, cleaning, or spraying operations. The heat and rays of the arc can react with vapors to form highly toxic and irritating gases.
- Do not weld on coated metals, such as galvanized, lead, or cadmium plated steel, unless the coating is removed from the weld area, the area is well ventilated, and if necessary, while wearing an air-supplied respirator. The coatings and any metals containing these elements can give off toxic fumes if welded.

ARC RAYS can burn eyes and skin.

Arc rays from the welding process produce intense visible and invisible (ultraviolet and infrared) rays that can burn eyes and skin. Sparks fly off from the weld.

- Wear a welding helmet fitted with a proper shade of filter to protect your face and eyes when welding or watching (see ANSI Z49.1 and Z87.1 listed in Safety Standards).
- Wear approved safety glasses with side shields under your helmet.
- Use protective screens or barriers to protect others from flash and glare; warn others not to watch the arc.
- Wear protective clothing made from durable, flame-resistant material (leather and wool) and foot protection.

WELDING can cause fire or explosion.

Welding on closed containers, such as tanks, drums, or pipes, can cause them to blow up. Sparks can fly off from the welding arc. The flying sparks, hot workpiece, and hot equipment can cause fires and burns. Accidental contact of electrode to metal objects can cause sparks, explosion, overheating, or fire. Check and be sure the area is safe before doing any welding.

- Protect yourself and others from flying sparks and hot metal.
- Do not weld where flying sparks can strike flammable material.
- Remove all flammables within 35 ft (10.7 m) of the welding arc. If this is not possible, tightly cover them with approved covers.
- Be alert that welding sparks and hot materials from welding can easily go through small cracks and openings to adjacent areas.
- Watch for fire, and keep a fire extinguisher nearby.
- Be aware that welding on a ceiling, floor, bulkhead, or partition can cause fire on the hidden side.
- Do not weld on closed containers such as tanks, drums, or pipes, unless they are properly prepared according to AWS F4.1 (see Safety Standards).
- Connect work cable to the work as close to the welding area as practical to prevent welding current from traveling long, possibly unknown paths and causing electric shock and fire hazards.
- Do not use welder to thaw frozen pipes.
- Remove stick electrode from holder or cut off welding wire at contact tip when not in use.
- Wear oil-free protective garments such as leather gloves, heavy shirt, cuffless trousers, high shoes, and a cap.
- Remove any combustibles, such as a butane lighter or matches, from your person before doing any welding.



FLYING METAL can injure eyes.

- Welding, chipping, wire brushing, and grinding cause sparks and flying metal. As welds cool, they can throw off slag.
- Wear approved safety glasses with side shields even under your welding helmet.

BUILDUP OF GAS can injure or kill.

- Shut off shielding gas supply when not in use.
- Always ventilate confined spaces or use approved air-supplied respirator.

HOT PARTS can cause severe burns.

- Do not touch hot parts bare handed.
- Allow cooling period before working on gun or torch.



MAGNETIC FIELDS can affect pacemakers.

- Pacemaker wearers keep away.
- Wearers should consult their doctor before going near arc welding, gouging, or spot welding operations.

NOISE can damage hearing.

Noise from some processes or equipment can damage hearing.

- Wear approved ear protection if noise level is high.

CYLINDERS can explode if damaged.

Shielding gas cylinders contain gas under high pressure. If damaged, a cylinder can explode. Since gas cylinders are normally part of the welding process, be sure to treat them carefully.

- Protect compressed gas cylinders from excessive heat, mechanical shocks, slag, open flames, sparks, and arcs.
- Install cylinders in an upright position by securing to a stationary support or cylinder rack to prevent falling or tipping.
- Keep cylinders away from any welding or other electrical circuits.
- Never drape a welding torch over a gas cylinder.
- Never allow a welding electrode to touch any cylinder.
- Never weld on a pressurized cylinder – explosion will result.
- Use only correct shielding gas cylinders, regulators, hoses, and fittings designed for the specific application; maintain them and associated parts in good condition.
- Turn face away from valve outlet when opening cylinder valve.
- Keep protective cap in place over valve except when cylinder is in use or connected for use.
- Read and follow instructions on compressed gas cylinders, associated equipment, and CGA publication P-1 listed in Safety Standards.

1-3. Additional Symbols For Installation, Operation, And Maintenance

FIRE OR EXPLOSION hazard.

- Do not install or place unit on, over, or near combustible surfaces.
- Do not install unit near flammables.
- Do not overload building wiring – be sure power supply system is properly sized, rated, and protected to handle this unit.

FALLING UNIT can cause injury.

- Use lifting eye to lift unit only, NOT running gear, gas cylinders, or any other accessories.
- Use equipment of adequate capacity to lift and support unit.
- If using lift forks to move unit, be sure forks are long enough to extend beyond opposite side of unit.



OVERUSE can cause OVERHEATING

- Allow cooling period; follow rated duty cycle.
- Reduce current or reduce duty cycle before starting to weld again.
- Do not block or filter airflow to unit.



STATIC (ESD) can damage PC boards.

- Put on grounded wrist strap BEFORE handling boards or parts.
- Use proper static-proof bags and boxes to store, move, or ship PC boards.

MOVING PARTS can cause injury.

- Keep away from moving parts.
- Keep away from pinch points such as drive rolls.

WELDING WIRE can cause injury.

- Do not press gun trigger until instructed to do so.
- Do not point gun toward any part of the body, other people, or any metal when threading welding wire.

MOVING PARTS can cause injury.

- Keep away from moving parts such as fans.
- Keep all doors, panels, covers, and guards closed and securely in place.



H.F. RADIATION can cause interference.

- High-frequency (H.F.) can interfere with radio navigation, safety services, computers, and communications equipment.
- Have only qualified persons familiar with electronic equipment perform this installation.
- The user is responsible for having a qualified electrician promptly correct any interference problem resulting from the installation.
- If notified by the FCC about interference, stop using the equipment at once.
- Have the installation regularly checked and maintained.
- Keep high-frequency source doors and panels tightly shut, keep spark gaps at correct setting, and use grounding and shielding to minimize the possibility of interference.

ARC WELDING can cause interference.

- Electromagnetic energy can interfere with sensitive electronic equipment such as computers and computer-driven equipment such as robots.
- Be sure all equipment in the welding area is electromagnetically compatible.
- To reduce possible interference, keep weld cables as short as possible, close together, and down low, such as on the floor.
- Locate welding operation 100 meters from any sensitive electronic equipment.
- Be sure this welding machine is installed and grounded according to this manual.
- If interference still occurs, the user must take extra measures such as moving the welding machine, using shielded cables, using line filters, or shielding the work area.

1-4. California Proposition 65 Warnings

▲ **Welding or cutting equipment produces fumes or gases which contain chemicals known to the State of California to cause birth defects and, in some cases, cancer. (California Health & Safety Code Section 25249.5 et seq.)**

▲ **Battery posts, terminals and related accessories contain lead and lead compounds, chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. Wash hands after handling.**

For Gasoline Engines:

▲ **Engine exhaust contains chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.**

For Diesel Engines:

▲ **Diesel engine exhaust and some of its constituents are known to the State of California to cause cancer, birth defects, and other reproductive harm.**

1-5. Principal Safety Standards

Safety in Welding, Cutting, and Allied Processes, ANSI Standard Z49.1, from American Welding Society, 550 N.W. LeJeune Rd, Miami FL 33126 (phone: 305-443-9353, website: www.aws.org).

Recommended Safe Practices for the Preparation for Welding and Cutting of Containers and Piping, American Welding Society Standard AWS F4.1, from American Welding Society, 550 N.W. LeJeune Rd, Miami, FL 33126 (phone: 305-443-9353, website: www.aws.org).

National Electrical Code, NFPA Standard 70, from National Fire Protection Association, P.O. Box 9101, 1 Battery March Park, Quincy, MA 02269–9101 (phone: 617–770–3000, website: www.nfpa.org and www.sparky.org).

Safe Handling of Compressed Gases in Cylinders, CGA Pamphlet P-1, from Compressed Gas Association, 1735 Jefferson Davis Highway, Suite 1004, Arlington, VA 22202–4102 (phone: 703–412–0900, website: www.cganet.com).

Code for Safety in Welding and Cutting, CSA Standard W117.2, from Canadian Standards Association, Standards Sales, 178 Rexdale Boulevard, Rexdale, Ontario, Canada M9W 1R3 (phone: 800–463–6727 or in Toronto 416–747–4044, website: www.csa–international.org).

Practice For Occupational And Educational Eye And Face Protection, ANSI Standard Z87.1, from American National Standards Institute, 11 West 42nd Street, New York, NY 10036–8002 (phone: 212–642–4900, website: www.ansi.org).

Standard for Fire Prevention During Welding, Cutting, and Other Hot Work, NFPA Standard 51B, from National Fire Protection Association, P.O. Box 9101, 1 Battery March Park, Quincy, MA 02269–9101 (phone: 617–770–3000,website: www.nfpa.org and www. sparky.org).

OSHA, Occupational Safety and Health Standards for General Industry, Title 29, Code of Federal Regulations (CFR), Part 1910, Subpart Q, and Part 1926, Subpart J, from U.S. Government Printing Office, Superintendent of Documents, P.O. Box 371954, Pittsburgh, PA 15250 (there are 10 Regional Offices––phone for Region 5, Chicago, is 312–353–2220,website: www.osha.gov).

1-6. EMF Information

Considerations About Welding And The Effects Of Low Frequency Electric And Magnetic Fields

Welding current, as it flows through welding cables, will cause electromagnetic fields. There has been and still is some concern about such fields. However, after examining more than 500 studies spanning 17 years of research, a special blue ribbon committee of the National Research Council concluded that: “The body of evidence, in the committee’s judgment, has not demonstrated that exposure to power-frequency electric and magnetic fields is a human-health hazard.” However, studies are still going forth and evidence continues to be examined. Until the final conclusions of the research are reached, you may wish to minimize your exposure to electromagnetic fields when welding or cutting.

To reduce magnetic fields in the workplace, use the following procedures:

1. Keep cables close together by twisting or taping them.
2. Arrange cables to one side and away from the operator.
3. Do not coil or drape cables around your body.
4. Keep welding power source and cables as far away from operator as practical.
5. Connect work clamp to workpiece as close to the weld as possible.

About Pacemakers:

Pacemaker wearers consult your doctor first. If cleared by your doctor, then following the above procedures is recommended.

SECTION 2 – CONSIGNES DE SÉCURITÉ – À LIRE AVANT UTILISATION

som_fre 8/03

2-1. Signification des symboles

Signifie « Mise en garde. Faire preuve de vigilance. » Cette procédure présente des risques identifiés par les symboles adjacents aux directives.

▲ **Identifie un message de sécurité particulier.**

☞ *Signifie « NOTA » ; n'est pas relatif à la sécurité.*

Ce groupe de symboles signifie « Mise en garde. Faire preuve de vigilance. » Il y a des dangers liés aux CHOCS ÉLECTRIQUES, aux PIÈCES EN MOUVEMENT et aux PIÈCES CHAUDES. Se reporter aux symboles et aux directives ci-dessous afin de connaître les mesures à prendre pour éviter tout danger.

2-2. Dangers relatifs au soudage à l'arc

▲ **Les symboles ci-après sont utilisés tout au long du présent manuel pour attirer l'attention sur les dangers potentiels et les identifier. Lorsqu'on voit un symbole, faire preuve de vigilance et suivre les directives mentionnées afin d'éviter tout danger. Les consignes de sécurité énoncées ci-après ne font que résumer le contenu des normes de sécurité mentionnées à la section 2-4. Lire et respecter toutes ces normes.**

▲ **L'installation, l'utilisation, l'entretien et les réparations ne doivent être confiés qu'à des personnes qualifiées.**

▲ **Pendant l'utilisation de l'appareil, tenir à l'écart toute personne, en particulier les enfants.**

LES DÉCHARGES ÉLECTRIQUES peuvent être mortelles.

Un simple contact avec des pièces sous tension peut causer une électrocution ou des blessures graves. L'électrode et le circuit de soudage sont sous tension dès que l'appareil est en fonctionnement. Le circuit d'entrée et les circuits internes de l'appareil sont également sous tension. En soudage semi–automatique ou automatique, le fil, le dévidoir, le logement des galets d'entraînement et les pièces métalliques en contact avec le fil de soudage sont sous tension. Tout matériel mal installé ou mal mis à la terre présente un danger.

- Ne jamais toucher aux pièces électriques sous tension.
- Porter des gants et des vêtements de protection secs et exempts de trous.
- S'isoler de la pièce et de la terre au moyen de tapis ou autres dispositifs isolants suffisamment grands pour empêcher tout contact physique avec la pièce ou la terre.
- Ne pas se servir d'une source de courant alternatif dans les zones humides, les endroits confinés ou là où on risque de tomber.
- Ne se servir d'une source de courant alternatif QUE si le procédé de soudage l'exige.
- Si l'utilisation d'une source de courant alternatif s'avère nécessaire, se servir de la fonction de télécommande si l'appareil en est équipé.
- Couper l'alimentation ou arrêter le moteur avant de procéder à l'installation, à la réparation ou à l'entretien de l'appareil. Couper/étiqueter l'alimentation selon la norme OSHA 29 CFR 1910.147 (voir les normes de sécurité).
- Installer et mettre à la terre correctement l'appareil conformément à son manuel d'utilisation et aux codes nationaux, provinciaux et municipaux.
- Toujours vérifier la terre du cordon d'alimentation – Vérifier et s'assurer que le fil de terre du cordon d'alimentation est bien raccordé à la borne de terre du sectionneur ou que la fiche du cordon est raccordée à une prise correctement mise à la terre.
- Pour exécuter les branchements d'entrée, fixer d'abord le conducteur de mise à la terre adéquat et contre–vérifier les connexions.
- Vérifier fréquemment le cordon d'alimentation et s'assurer qu'il n'est ni endommagé ni dénudé ; le remplacer immédiatement s'il est endommagé – tout câble dénudé peut causer une électrocution.
- Mettre l'appareil hors tension quand on ne l'utilise pas.
- Ne pas utiliser de câbles usés, endommagés, de calibre insuffisant ou mal épissés.
- Ne pas s'enrouler les câbles autour du corps.
- Si la pièce soudée doit être mise à la terre, le faire directement avec un câble distinct.
- Ne pas toucher l'électrode quand on est en contact avec la pièce, la terre ou une électrode d'une autre machine.
- N'utiliser que du matériel en bon état. Réparer ou remplacer sur–le–champ les pièces endommagées. Entretenir l'appareil conformément au présent manuel.
- Porter un harnais de sécurité quand on travaille en hauteur.
- Maintenir solidement en place tous les panneaux et capots.
- Fixer le câble de retour de façon à obtenir un bon contact métal sur métal avec la pièce à souder ou la table de travail, le plus près possible de la soudure.
- Ne pas connecter plus d'une électrode ou plus d'un câble de masse à un même terminal de sortie.

Il subsiste un COURANT CONTINU IMPORTANT dans les convertisseurs après la suppression de l'alimentation électrique.

- Arrêter les convertisseurs, débrancher le courant électrique et décharger les condensateurs d'alimentation selon les instructions énoncées à la section Entretien avant de toucher les pièces.

LES FUMÉES ET LES GAZ peuvent être dangereux.

Le soudage génère des fumées et des gaz dont l'inhalation peut être dangereuse pour la santé.

- Se tenir à distance des fumées et ne pas les inhaler.
- À l'intérieur, ventiler la zone et/ou utiliser un dispositif d'aspiration au niveau de l'arc pour l'évacuation des fumées et des gaz de soudage.
- Si la ventilation est insuffisante, utiliser un respirateur à adduction d'air agréé.
- Lire les fiches techniques de santé–sécurité (FTSS) et les instructions du fabricant concernant les métaux, les consommables, les revêtements, les nettoyants et les dégraisseurs.
- Ne travailler dans un espace clos que s'il est bien ventilé ou porter un respirateur à adduction d'air. Demander toujours à un surveillant dûment formé de se tenir à proximité. Des fumées et des gaz de soudage peuvent se substituer à l'air, abaisser la teneur en oxygène et causer des lésions ou des accidents mortels. S'assurer que l'air est respirable.
- Ne pas souder à proximité d'opérations de dégraissage, de nettoyage ou de pulvérisation. La chaleur et les rayons de l'arc peuvent réagir en présence de vapeurs et former des gaz hautement toxiques et irritants.
- Ne pas souder de métaux munis d'un revêtement, tels que la tôle d'acier galvanisée, plombée ou cadmiée, à moins que le revêtement n'ait été enlevé dans la zone de soudage, que l'endroit soit bien ventilé, et si nécessaire, porter un respirateur à adduction d'air. Les revêtements et tous les métaux renfermant ces éléments peuvent dégager des fumées toxiques lorsqu'on les soude.

LES RAYONS DE L'ARC peuvent causer des brûlures oculaires et cutanées.

Le rayonnement de l'arc génère des rayons visibles et invisibles intenses (ultraviolets et infrarouges) susceptibles de causer des brûlures oculaires et cutanées. Des étincelles sont projetées pendant le soudage.

- Porter un masque de soudage muni d'un filtre de la nuance adéquate pour se protéger le visage et les yeux pendant le soudage ou pour regarder (voir les normes de sécurité ANSI Z49.1 et Z87.1).
- Porter des lunettes de sécurité à écrans latéraux sous le masque.
- Utiliser des écrans ou des barrières pour protéger les tiers de l'éclat éblouissant ou aveuglant de l'arc ; leur demander de ne pas regarder l'arc.
- Porter des vêtements de protection en matière durable et ignifuge (cuir ou laine) et des chaussures de sécurité.

LE SOUDAGE peut causer un incendie ou une explosion.

Le soudage effectué sur des récipients fermés tels que des réservoirs, des fûts ou des conduites peut causer leur éclatement. Des étincelles peuvent être projetées de l'arc de soudure. La projection d'étincelles, les pièces chaudes et les équipements chauds peuvent causer des incendies et des brûlures. Le contact accidentel de l'électrode avec tout objet métallique peut causer des étincelles, une explosion, un surchauffement ou un incendie. Avant de commencer le soudage, vérifier et s'assurer que l'endroit ne présente pas de danger.

- Se protéger et protéger les tiers de la projection d'étincelles et de métal chaud.
- Ne pas souder à un endroit où des étincelles peuvent tomber sur des substances inflammables.
- Placer toutes les substances inflammables à une distance de 10,7 m de l'arc de soudage. En cas d'impossibilité, les recouvrir soigneusement avec des protections agréées.
- Des étincelles et des matières en fusion peuvent facilement passer même par des fissures et des ouvertures de petites dimensions.
- Surveiller tout déclenchement d'incendie et tenir un extincteur à proximité.
- Le soudage effectué sur un plafond, un plancher, une paroi ou une cloison peut déclencher un incendie de l'autre côté.
- Ne pas souder des récipients fermés tels que des réservoirs, des fûts ou des conduites, à moins qu'ils n'aient été préparés conformément à l'AWS F4.1 (voir les normes de sécurité).
- Brancher le câble sur la pièce le plus près possible de la zone de soudage pour éviter que le courant ne circule sur une longue distance, par des chemins inconnus, et ne cause des risques d'électrocution et d'incendie.
- Ne pas utiliser le poste de soudage pour dégeler des conduites gelées.
- En cas de non utilisation, enlever la baguette d'électrode du porte–électrode ou couper le fil au raz du tube–contact.
- Porter des vêtements de protection exempts d'huile tels que des gants en cuir, une chemise en tissu épais, des pantalons sans revers, des chaussures montantes et un masque.
- Avant de souder, retirer tout produit combustible de ses poches, tel qu'un briquet au butane ou des allumettes.



LES PARTICULES PROJETÉES peuvent blesser les yeux.

- Le soudage, le burinage, le passage de la pièce à la brosse métallique et le meulage provoquent l'émission d'étincelles et de particules métalliques. Pendant leur refroidissement, les soudures risquent de projeter du laitier.
- Porter des lunettes de sécurité à écrans latéraux agréés, même sous le masque de soudage.

LES ACCUMULATIONS DE GAZ peuvent causer des blessures ou même la mort.

- Couper l'alimentation en gaz protecteur en cas de non utilisation.
- Veiller toujours à bien ventiler les espaces confinés ou porter un respirateur à adduction d'air agréé.

LES PIÈCES CHAUDES peuvent causer des brûlures graves.

- Ne pas toucher les pièces chaudes à main nue.
- Prévoir une période de refroidissement avant d'utiliser le pistolet ou la torche.

LES CHAMPS MAGNÉTIQUES peuvent perturber le fonctionnement des stimulateurs cardiaques.

- Les personnes qui portent un stimulateur cardiaque doivent se tenir à distance.
- Ils doivent consulter leur médecin avant de s'approcher d'un lieu où on exécute des opérations de soudage à l'arc, de gougeage ou de soudage par points.

LE BRUIT peut affecter l'ouïe.

Le bruit de certains processus et équipements peut affecter l'ouïe.

- Porter des protecteurs d'oreille agréés si le niveau sonore est trop élevé.

Les BOUTEILLES endommagées peuvent exploser.

Les bouteilles de gaz protecteur contiennent du gaz sous haute pression. Toute bouteille endommagée peut exploser. Comme les bouteilles de gaz font normalement partie du procédé de soudage, les manipuler avec précaution.

- Protéger les bouteilles de gaz comprimé de la chaleur excessive, des chocs mécaniques, du laitier, des flammes nues, des étincelles et des arcs.
- Placer les bouteilles debout en les fixant dans un support stationnaire ou dans un porte–bouteilles pour les empêcher de tomber ou de se renverser.
- Tenir les bouteilles éloignées des circuits de soudage ou autres circuits électriques.
- Ne jamais poser une torche de soudage sur une bouteille de gaz.
- Ne jamais mettre une électrode de soudage en contact avec une bouteille de gaz.
- Ne jamais souder une bouteille contenant du gaz sous pression – elle risquerait d'exploser.
- N'utiliser que les bouteilles de gaz protecteur, régulateurs, tuyaux et raccords adéquats pour l'application envisagée ; les maintenir en bon état, ainsi que les pièces connexes.
- Détourner la tête lorsqu'on ouvre la soupape d'une bouteille.
- Laisser le capuchon protecteur sur la soupape, sauf en cas d'utilisation ou de branchement de la bouteille
- Lire et suivre les instructions concernant les bouteilles de gaz comprimé, les équipements associés et les publications P–1 de la CGA, mentionnées dans les normes de sécurité.

2-3. Autres symboles relatifs à l'installation, au fonctionnement et à l'entretien de l'appareil.

Risque D'INCENDIE OU D'EXPLOSION

- Ne pas placer l'appareil sur une surface inflammable, ni au−dessus ou à proximité d'elle.
- Ne pas installer l'appareil à proximité de produits inflammables.
- Ne pas surcharger l'installation électrique – s'assurer que l'alimentation est correctement dimensionnée et protégée avant de mettre l'appareil en service.

LA CHUTE DE L'APPAREIL peut blesser.

- N'utiliser que l'anneau de levage pour lever l'appareil. NE PAS utiliser le chariot, les bouteilles de gaz ou tout autre accessoire.
- Utiliser un engin de capacité adéquate pour lever l'appareil.
- Si on utilise un chariot élévateur pour déplacer l'unité, s'assurer que les fourches sont suffisamment longues pour dépasser du côté opposé de l'appareil.



L'EMPLOI EXCESSIF peut FAIRE SURCHAUFFER L'ÉQUIPEMENT.

- Prévoir une période de refroidissement ; respecter le cycle opératoire nominal.
- Réduire le courant ou le cycle opératoire avant de reprendre le soudage.
- Ne pas obstruer les orifices ou filtrer l'alimentation en air du poste.



LES CHARGES ÉLECTROSTATIQUES peuvent endommager les circuits imprimés.

- Mettre un bracelet antistatique AVANT de manipuler des cartes ou des pièces.
- Utiliser des pochettes et des boîtes antistatiques pour stocker, déplacer ou expédier des cartes de circuits imprimés.

LES PIÈCES MOBILES peuvent causer des blessures.

- Se tenir à l'écart des pièces mobiles.
- Se tenir à l'écart des points de coincement tels que les dévidoirs.

LES FILS DE SOUDAGE peuvent causer des blessures.

- Ne pas appuyer sur la gâchette avant d'en avoir reçu l'instruction.
- Ne pas diriger le pistolet vers soi, vers d'autres personnes ou vers toute pièce mécanique en engageant le fil de soudage.

LES ORGANES MOBILES peuvent causer des blessures.

- Se tenir à l'écart des organes mobiles comme les ventilateurs.
- Maintenir fermés et bien fixés les portes, panneaux, recouvrements et dispositifs de protection.



LE RAYONNEMENT HAUTE FRÉQUENCE (H. F.) risque de causer des interférences.

- Le rayonnement haute fréquence peut causer des interférences avec les équipements de radionavigation et de communication, les services de sécurité et les ordinateurs.
- Ne demander qu'à des personnes qualifiées familiarisées avec les équipements électroniques de faire fonctionner l'installation.
- L'utilisateur est tenu de faire corriger rapidement par un électricien qualifié les interférences causées par l'installation.
- Si la Federal Communications Commission signale des interférences, arrêter immédiatement l'appareil.
- Faire régulièrement contrôler et entretenir l'installation.
- Maintenir soigneusement fermés les panneaux et les portes des sources de haute fréquence, maintenir le jeu d'éclatement au réglage adéquat et utiliser une terre et un blindage pour réduire les interférences éventuelles.



LE SOUDAGE À L'ARC peut causer des interférences.

- L'énergie électromagnétique peut causer des interférences avec l'équipement électronique sensible tel que les ordinateurs et l'équipement commandé par ordinateur tel que les robots.
- Veiller à ce que tout l'équipement de la zone de soudage soit compatible au point de vue électromagnétique.
- Pour réduire la possibilité d'interférence, maintenir les câbles de soudage aussi courts que possible, les grouper, et les poser aussi bas que possible (par ex. : à terre).
- Veiller à souder à une distance de 100 mètres de tout équipement électronique sensible.
- Veiller à ce que le poste de soudage soit posé et mis à la terre conformément au présent manuel.
- En cas d'interférences après exécution des directives précédentes, il incombe à l'utilisateur de prendre des mesures supplémentaires telles que le déplacement du poste, l'utilisation de câbles blindés, l'utilisation de filtres de ligne ou la pose de protecteurs dans la zone de travail.

LES CHAMPS MAGNÉTIQUES peuvent affecter les stimulateurs cardiaques.

- Porteurs de stimulateur cardiaque, restez à distance.
- Les porteurs d'un stimulateur cardiaque doivent d'abord consulter leur médecin avant de s'approcher des opérations de soudage à l'arc, de gougeage ou de soudage par points.

2-4. Principales normes de sécurité

Safety in Welding, Cutting, and Allied Processes, norme ANSI Z49.1, de l'American Welding Society, 550 N.W. LeJeune Rd, Miami FL 33126 (téléphone : (305) 443–9353, site Web : www.aws.org).

Recommended Safe Practices for the Preparation for Welding and Cutting of Containers and Piping, norme American Welding Society AWS F4.1, de l'American Welding Society, 550 N.W. LeJeune Rd, Miami, FL 33126 (téléphone : (305) 443–9353, site Web : www.aws.org).

National Electrical Code, norme NFPA 70, de la National Fire Protection Association, P.O. Box 9101, 1 Battery March Park, Quincy, MA 02269–9101 (téléphone : (617) 770–3000, sites Web : www.nfpa.org et www.sparky.org).

Safe Handling of Compressed Gases in Cylinders, brochure CGA P–1, de la Compressed Gas Association, 1735 Jefferson Davis Highway, Suite 1004, Arlington, VA 22202–4102 (téléphone : (703) 412–0900, site Web : www.cganet.com).

Code for Safety in Welding and Cutting, norme CSA W117.2, de la Canadian Standards Association, Standards Sales, 178 boulevard Rexdale, Rexdale (Ontario) Canada M9W 1R3 (téléphone : (800) 463–6727 ou à Toronto : (416) 747–4044, site Web : www.csa–international.org).

Practice For Occupational And Educational Eye And Face Protection, norme ANSI Z87.1, de l'American National Standards Institute, 11 West 42nd Street, New York, NY 10036–8002 (téléphone : (212) 642–4900, site Web : www.ansi.org).

Standard for Fire Prevention During Welding, Cutting, and Other Hot Work, norme NFPA 51B, de la National Fire Protection Association, P.O. Box 9101, 1 Battery March Park, Quincy, MA 02269–9101 (téléphone : (617) 770–3000, site Web : www.nfpa.org et www.sparky.org).

OSHA, Occupational Safety and Health Standards for General Industry, Title 29, Code of Federal Regulations (CFR), Part 1910, Subpart Q, and Part 1926, Subpart J, de l'U.S. Government Printing Office, Superintendent of Documents, P.O. Box 371954, Pittsburgh, PA 15250 (il y a 10 bureaux régionaux – Téléphone pour la Région 5, Chicago : (312) 353–2220, site Web : www.osha.gov).

2-5. Information sur les champs électromagnétiques

Données sur le soudage électrique et les effets des champs magnétiques basse fréquence sur l'organisme

En parcourant les câbles de soudage, le courant crée des champs électromagnétiques. Les effets potentiels de tels champs restent préoccupants. Cependant, après avoir examiné plus de 500 études qui ont été faites pendant une période de recherche de 17 ans, un comité de spécialistes du National Research Council a conclu : « L'accumulation de preuves n'a pas démontré que l'exposition aux champs magnétiques et aux champs électriques à haute fréquence constitue un risque pour la santé humaine ». Toutefois, les études et l'examen des preuves se poursuivent. En attendant les conclusions finales de la recherche, il serait souhaitable de réduire l'exposition aux champs électromagnétiques pendant le soudage ou le coupage.

Afin de réduire les champs électromagnétiques en milieu de travail, respecter les consignes suivantes :

1. Garder les câbles ensemble en les torsadant ou en les fixant avec du ruban adhésif.

2. Mettre tous les câbles du côté opposé à l'opérateur.

3. Ne pas s'enrouler les câbles autour du corps.

4. Garder le poste de soudage et les câbles le plus loin possible de soi.

5. Placer la pince de masse le plus près possible de la zone de soudage.

Consignes relatives aux stimulateurs cardiaques :

Les personnes qui portent un stimulateur cardiaque doivent avant tout consulter leur médecin. Si ce dernier les déclare aptes, il leur est recommandé de respecter les consignes ci-dessus.

SECTION 3 – DEFINITIONS

3-1. Symbols And Definitions

Wire Feed	Output	Duty Cycle	Do Not Switch While Welding
Volts	Increase	On	Off
Gas Metal Arc Welding (GMAW) Gun	Wire Feed Spool Gun	Gas Input	Gas Output
Voltage Input	Press To Reset	Rated No-Load Voltage (Average)	

SECTION 4 – INSTALLATION

4-1. Specifications

A. 115 VAC

Rated Welding Output	Amperage Range	Maximum Open-Circuit Voltage DC	Amperes Input at Rated Load Output 115 V, 60 Hz, Single-Phase	KVA	KW
68 A @ 19.5 Volts DC*, 20% Duty Cycle	30 – 135	32	15	2.27	1.85
90 A @ 18.0 Volts DC, 20% Duty Cycle			20	2.78	2.23
*** CSA Rating**					

B. 230 VAC

Rated Welding Output	Amperage Range	Maximum Open-Circuit Voltage DC	Amperes Input at Rated Load Output 230 V, 50/60 Hz, Single-Phase	KVA	KW
150 A @ 23 Volts DC, 40% Duty Cycle	30 – 175	32	25.0	5.74	4.93

C. General Specifications

Wire Type and Diameter			Wire Feed Speed	Maximum Spool Size	Dimensions	Net Weight w/ Gun
Solid/Stainless	**Flux Cored**	**Aluminum**	50 – 600 IPM (1.3 – 15.2 m/min)	12 in (305 mm) Diameter 33 lb (15 kg)	H: 32 in (813 mm) W: 19 in (483 mm) D: 39 in (991 mm)	168 lb (76 kg)
.023 – .035 in (0.6 – 0.9 mm)	.030 – .035 in (0.8 – 0.9 mm)	.030 – .035 in (0.8 – 0.9 mm)				

4-2. Duty Cycle And Overheating

Duty Cycle is percentage of 10 minutes that unit can weld at rated load without overheating.

If unit overheats, thermostat(s) opens, output stops, and cooling fan runs. Wait fifteen minutes for unit to cool. Reduce amperage or duty cycle before welding.

▲ **Exceeding duty cycle can damage unit or gun and void warranty.**

A. 115 VAC

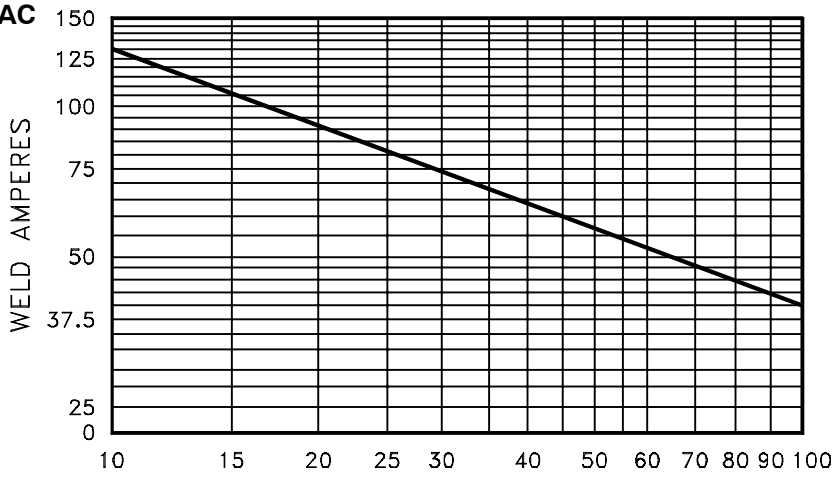

20% duty cycle at 90 amps

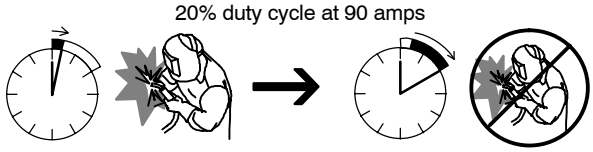

2 Minutes Welding — 8 Minutes Resting

B. 230 VAC

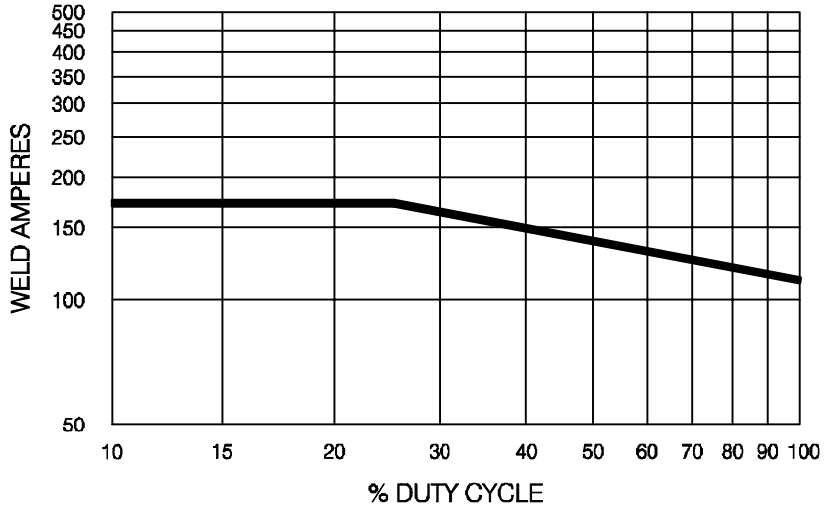

40% duty cycle at 150 amps

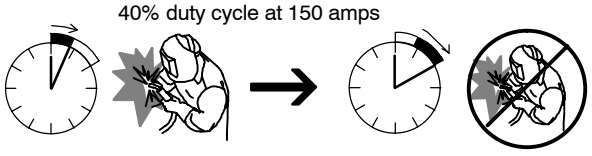

4 Minutes Welding — 6 Minutes Resting

Overheating

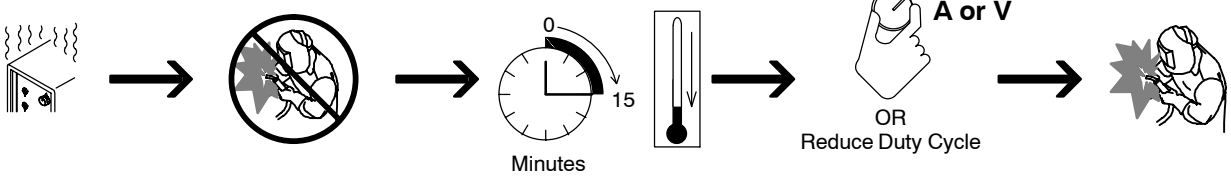

duty1 4/95 – 124 655 / 220 896-A

4-3. Volt-Ampere Curves

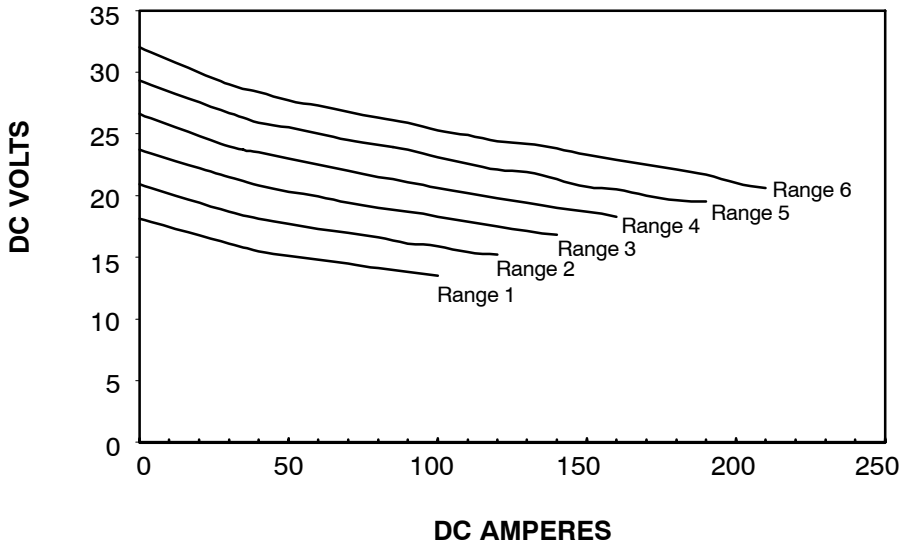

The volt-ampere curves show the minimum and maximum voltage and amperage output capabilities of the welding power source. Curves of other settings fall between the curves shown.

☞ *Ranges 4, 5, and 6 apply to 230 VAC only.*

ssb1.1 10/91 – 199 212

4-4. MIG Welding Gun Duty Cycle And Overheating

⚠ CAUTION

WELDING LONGER THAN RATED DUTY CYCLE can damage gun and void warranty.

- Do not weld at rated load longer than shown below.
- Using gasless flux cored wire reduces gun duty cycle.

warn7.1 8/93

Definition



Duty Cycle is percentage of 10 minutes that gun can weld at rated load without overheating.

.023 To .045 in (0.6 To 1.1 mm) Hard Or Flux Cored Wires

100% Duty Cycle At 100 Amperes Using CO_2



Continuous Welding

.023 To .045 in (0.6 To 1.1 mm) Hard Or Flux Cored Wires

60% Duty Cycle At 100 Amperes Using Mixed Gases

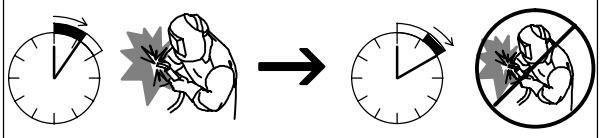

6 Minutes Welding

4 Minutes Resting

SB1.1 8/93

4-5. Installing Work Clamp

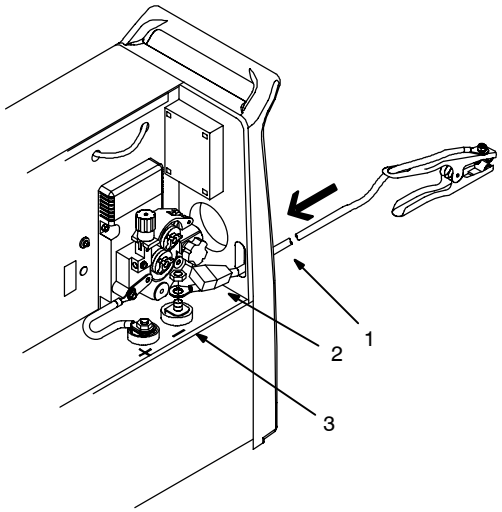

1 Work Cable

2 Boot

Route cable through front panel opening. Slide boot onto work cable.

3 Negative (–) Output Terminal

Connect cable to terminal and cover connection with boot.

Close door.

Tools Needed:

3/4 in

803 859-B

4-6. Installing Welding Gun

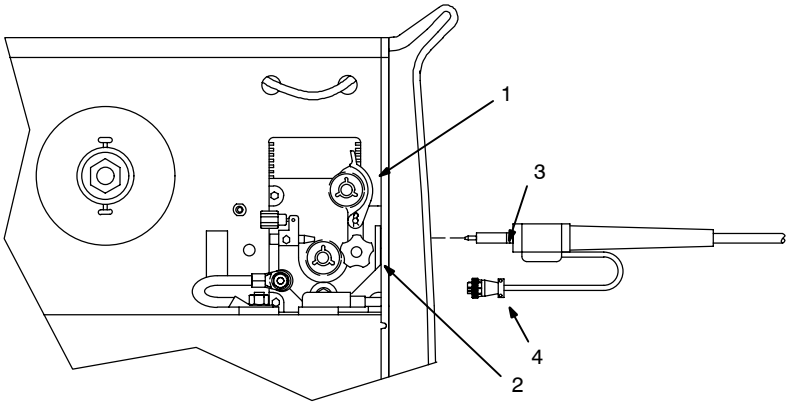

1 Drive Assembly

2 Gun Securing Knob

3 Gun End

Loosen securing knob. Insert gun end through opening until it bottoms against drive assembly (make sure gun end does not touch drive rolls). Tighten knob.

4 Gun Trigger Plug

Insert plug into receptacle, and tighten threaded collar.

Close door.

803 860-B

4-7. Setting Gun Polarity For Wire Type

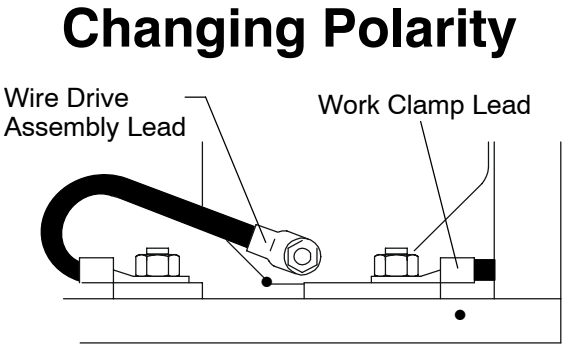

1 Polarity Changeover Label Information

Always read and follow manufacture's recommended polarity.

Shown as shipped – **Electrode Positive** (DCEP): For solid steel, stainless steel, aluminum, or flux core with gas wires (GMAW).

Electrode Negative (DCEN): Reverse lead connections at terminals from that shown above for gasless flux core wires (FCAW). Drive assembly becomes negative.

3/4, 11/16 in

Ref. 190 821-A

4-8. Installing Gas Supply



☞ *DO NOT use Argon/Mixed gas regulator/flowmeter with CO_2 shielding gas. See Parts List for optional CO_2 gas regulator/flowmeter.*

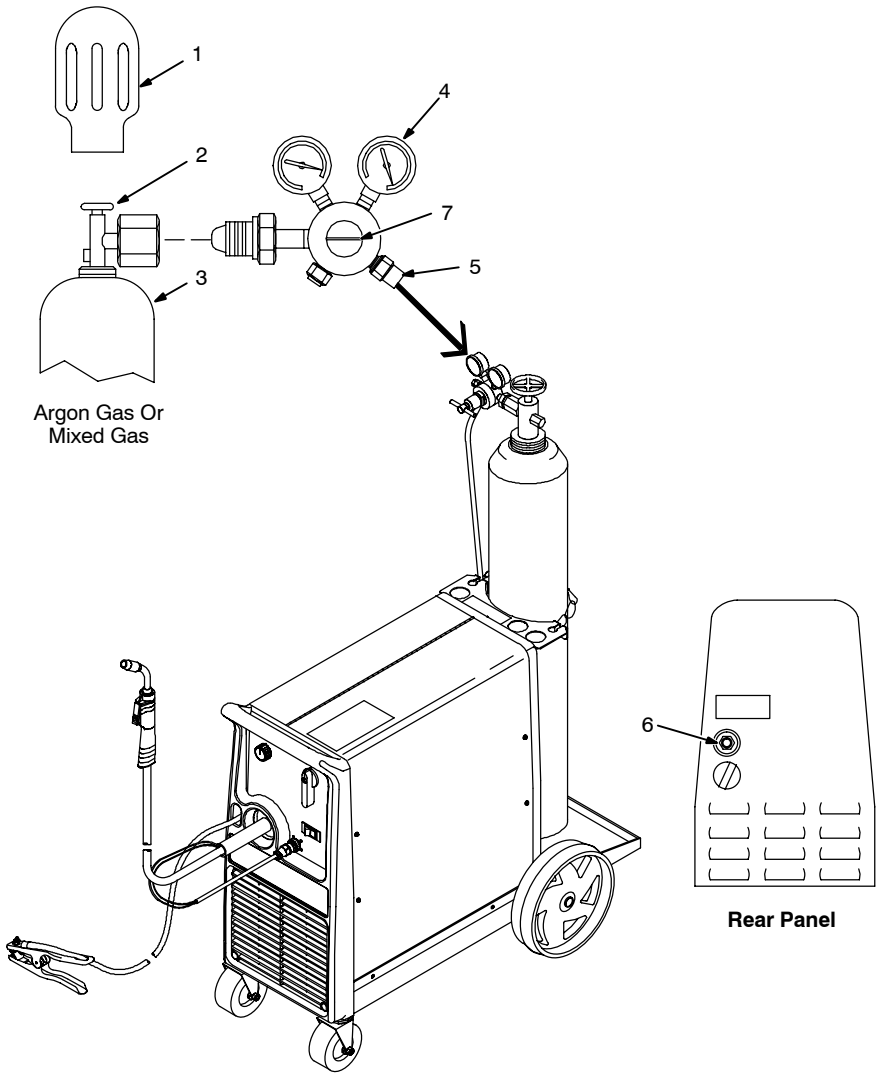

Tools Needed:

1-1/8, 5/8 in

Obtain gas cylinders and chain to running gear, wall, or other stationary support so cylinders cannot fall and break off valve.

1 Cap

2 Cylinder Valve

Remove cap, stand to side of valve, and open valve slightly. Gas flow blows dust and dirt from valve. Close valve.

3 Cylinder

4 Regulator/Flowmeter

Install so face is vertical.

5 Regulator/Flowmeter Gas Hose Connection

6 Welding Power Source Gas Hose Connection For MIG Gun

Connect gas hose between regulator/flowmeter gas hose connection, and fitting on rear of welding power source.

7 Gas Flow Adjustment Control

Typical flow rate is 25 cfh (cubic feet per hour). Check wire manufacturer's recommended flow rate.

803 861-B

4-9. Installing MIG Wire Spool and Adjusting Hub Tension

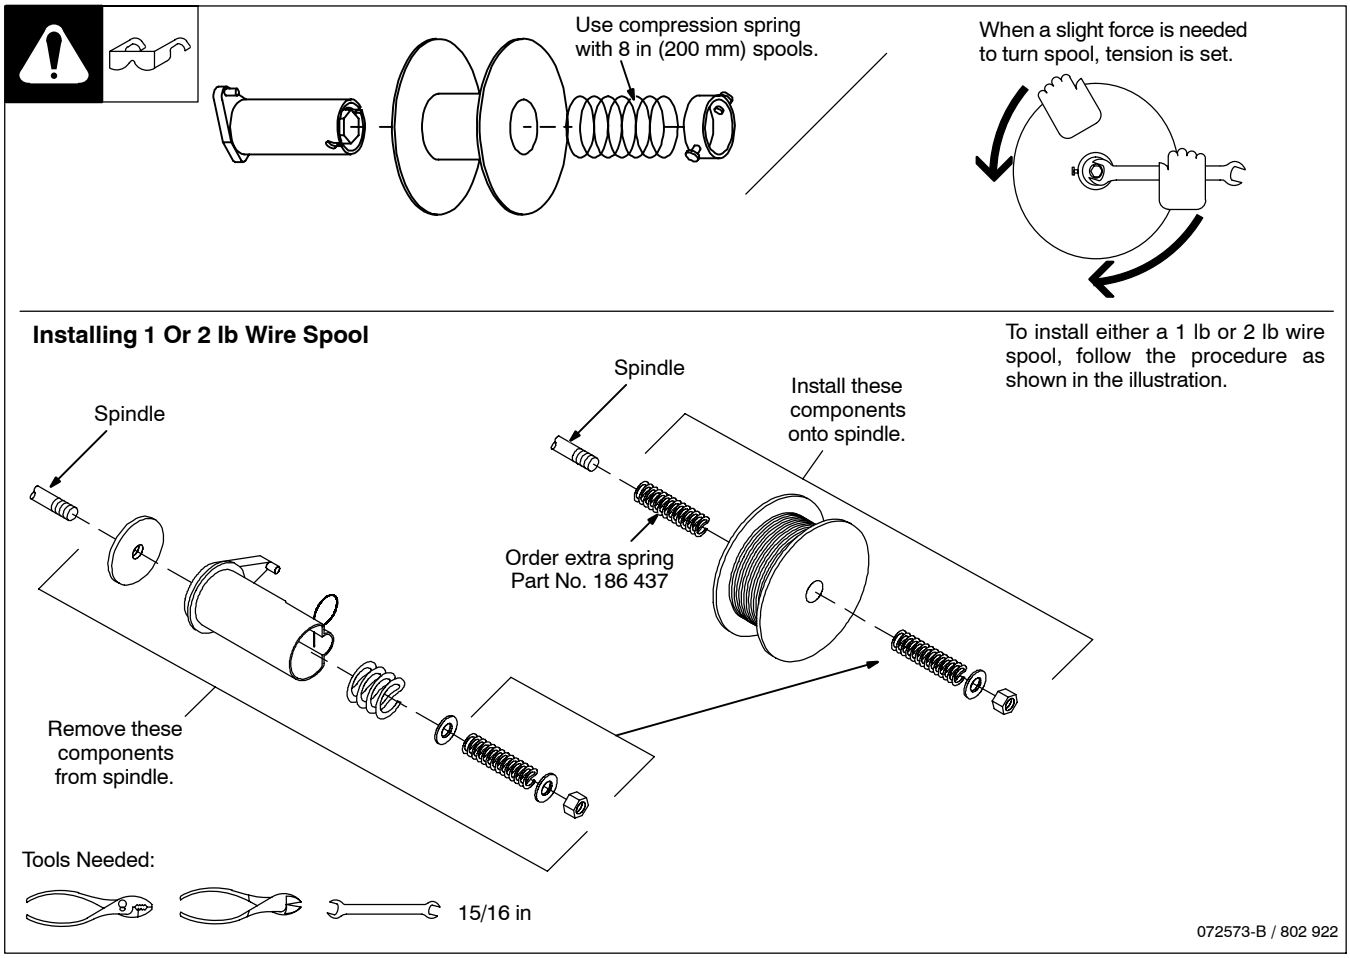
Use compression spring with 8 in (200 mm) spools.
When a slight force is needed to turn spool, tension is set.
Installing 1 Or 2 lb Wire Spool
To install either a 1 lb or 2 lb wire spool, follow the procedure as shown in the illustration.
Spindle
Spindle
Install these components onto spindle.
Order extra spring Part No. 186 437
Remove these components from spindle.
Tools Needed:
15/16 in
072573-B / 802 922

4-10. Input Power For 230 VAC



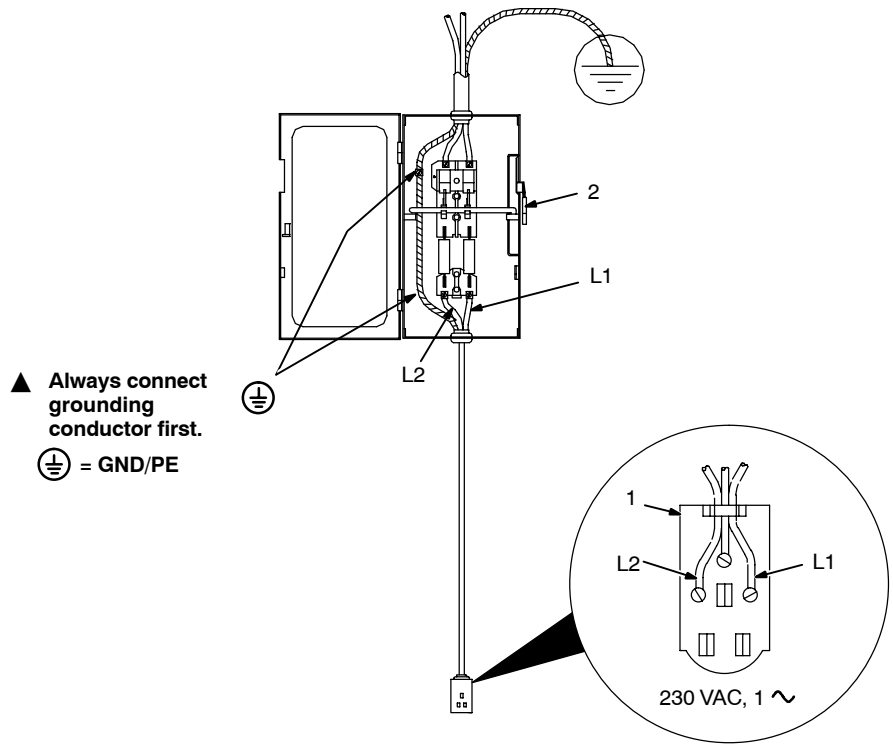

▲ **Always connect grounding conductor first.**

⏚ **= GND/PE**

See unit rating label for correct input power (see Section 4-13).

1 Receptacle (NEMA 6-50R) Customer Supplied

2 Line Disconnect Device

See Section 4-11.

▲ **Special installation may be required where gasoline or volatile liquids are present – see NEC Article 511 or CEC Section 20.**

ssb2.2* 1/94 – Ref. 802 443-A

4-11. Electrical Service Guide For 230 VAC

	60 Hz Single Phase
Input Voltage	230
Input Amperes At Rated Output	25
Max Recommended Standard Fuse Rating In Amperes [1]	
Time-Delay [2]	30
Normal Operating [3]	35
Min Input Conductor Size In AWG	12
Max Recommended Input Conductor Length In Feet (Meters)	79 (24)
Min Grounding Conductor Size In AWG	12

Reference: 1999 National Electrical Code (NEC)

1 Consult factory for circuit breaker applications.

2 "Time-Delay" fuses are UL class "RK5" .

3 "Normal Operating" (general purpose - no intentional delay) fuses are UL class "K5" (up to and including 60 amp), and UL class "H" (65 amp and above).

4-12. Extension Cord Data

NOTE ☞ *When calculating max. cord length, remember to include conductor length from line disconnect device to input power receptacle.*

Input Voltage	Input Power Phase	Hertz	Conductor Size	Max. Cord Length
115 V	1	60	10 AWG	34 ft (10 m)
230 V	1	60	12 AWG	79 ft (24 m)

4-13. Selecting A Location And Connecting Input Power



▲ **Do Not cut off power cord connector and attempt to hard wire the power cord. The power cord connector and plugs are designed to work with pre-installed outlet receptacles.**

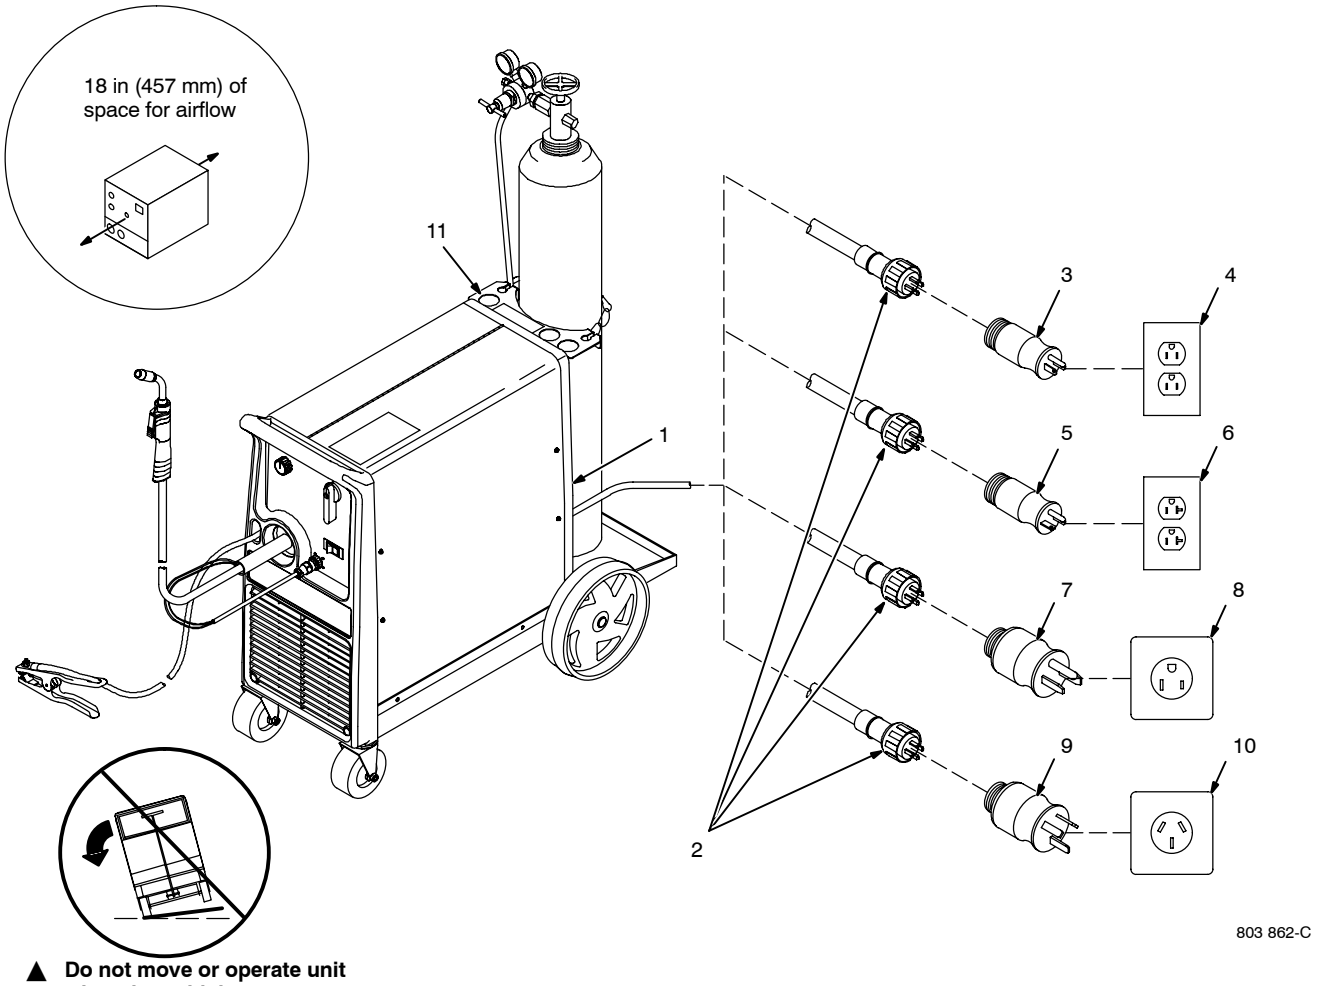

▲ **Do not move or operate unit where it could tip.**

▲ **Special installation may be required where gasoline or volatile liquids are present – see NEC Article 511 or CEC Section 20.**

For 115 volts ac input power, a 15 or 20 ampere individual branch circuit protected by time-delay fuses or circuit breaker is required. For 230 volts ac input power, see Section 4-10.

1 Rating Label

Supply correct input power.

2 Power Cord Connector

3 Plug – NEMA Type 5-15P

4 Receptacle – NEMA Type 5-15R (Customer Supplied)

5 Plug – NEMA Type 5-20P (Optional)

6 Receptacle NEMA Type 5-20R (Customer Supplied)

7 Plug – NEMA Type 6-50P

8 Receptacle – NEMA Type 6-50R (Customer Supplied)

9 Plug – NEMA Type 10-50P (Optional)

10 Receptacle – NEMA Type 10-50R (Customer Supplied)

Select plug for power supply receptacle available at site. Install plug onto power cord adapter. As threaded collar is tightened, push plug onto adapter until collar is completely tight.

Connect plug to receptacle.

11 Cylinder Support Bracket

Holes in the bracket provide a location to store the unused power cord plugs.

4-14. Threading Welding Wire

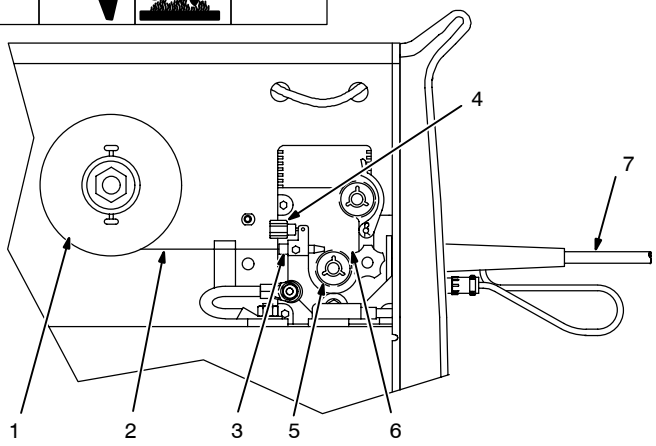

1 Wire Spool
2 Welding Wire
3 Inlet Wire Guide
4 Pressure Adjustment Knob
5 Drive Roll
6 Outlet Wire Guide
7 Gun Conduit Cable

Lay gun cable out straight.

Tools Needed:



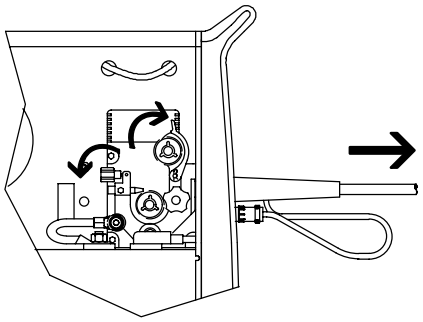

Open pressure assembly.

☞ *Hold wire tightly to keep it from unraveling.*



Pull and hold wire; cut off end.

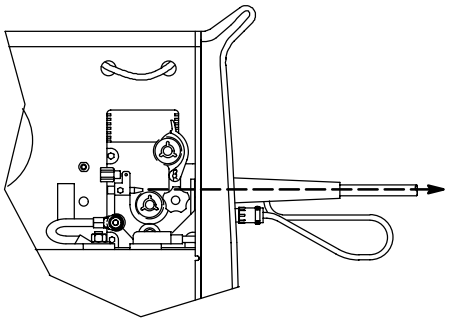

Push wire thru guides into gun; continue to hold wire.

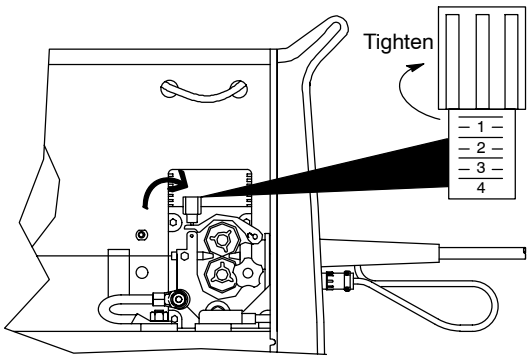

☞ *Use pressure indicator scale to set a desired drive roll pressure.*

Pressure Indicator Scale

Close and tighten pressure assembly, and let go of wire.



Remove gun nozzle and contact tip.



Turn On.



Press gun trigger until wire comes out of gun. Reinstall contact tip and nozzle

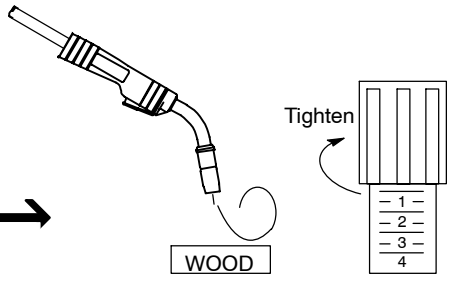

Feed wire to check drive roll pressure. Tighten knob enough to prevent slipping.



Cut off wire. Close and latch door.

Ref. 803 860-B / S-0627-A

4-15. Installing Diverter Valve And Switch For Optional Spool Gun

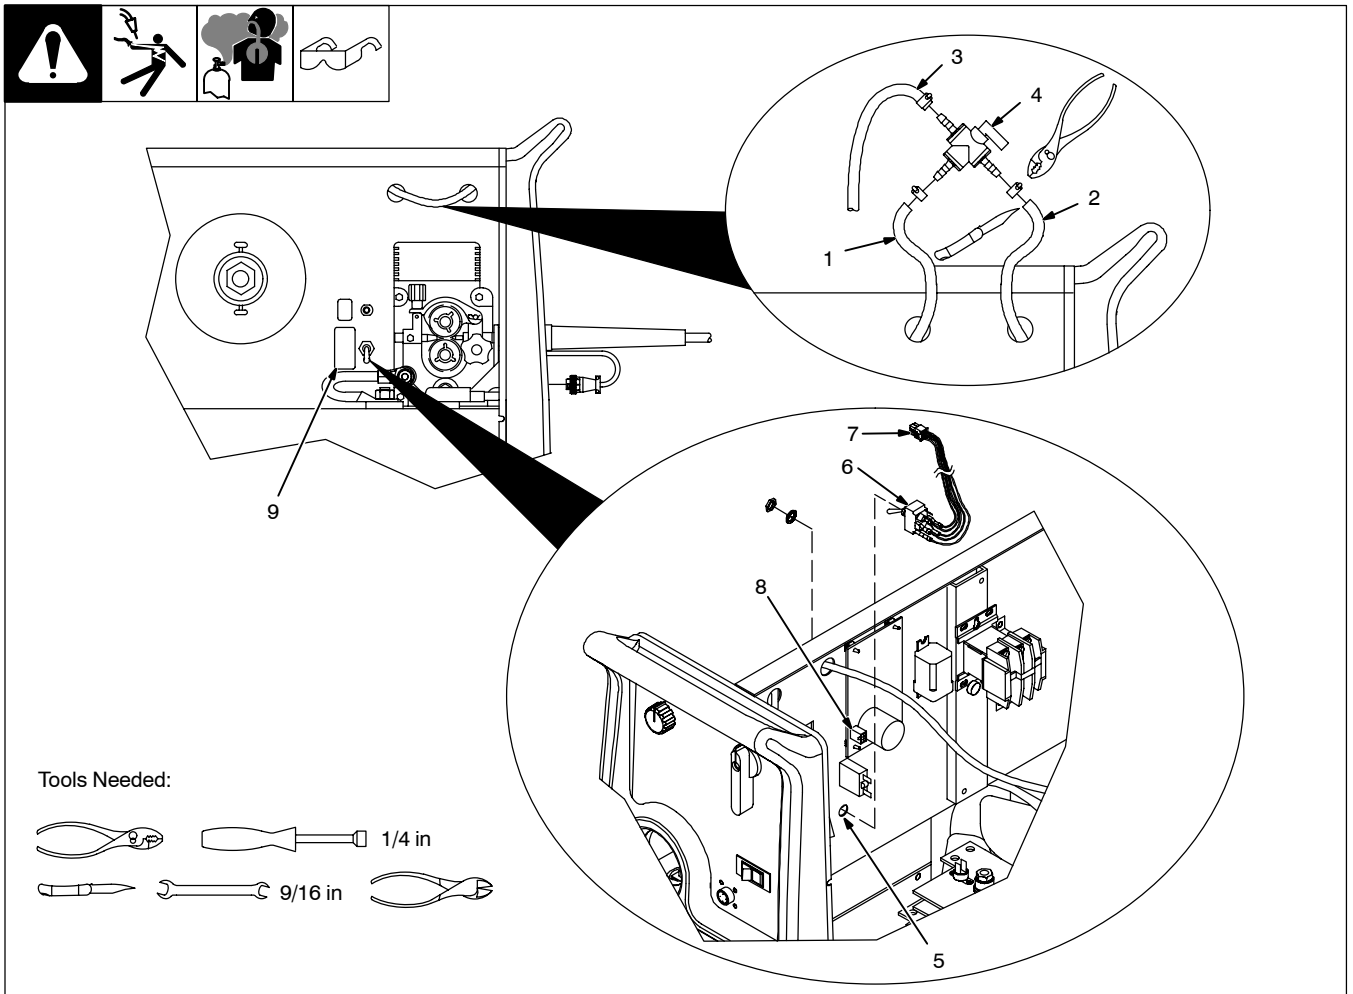

Tools Needed:

Ref. 803 906-B / 803 908-A

▲ **Turn Off unit, and disconnect input power.**

Disconnect and remove MIG (GMAW) welding gun, if applicable.

1 Input End Of Existing Gas Hose

2 Output End Of Existing Gas Hose

3 Spool Gun Gas Hose

4 Gas Diverter Valve

To install diverter valve, cut existing gas hose approximately in middle of hose.

Install supplied hose clamp onto end of output hose, and slide end of hose onto input barbed fitting on diverter valve. Secure with hose clamp.

Install another supplied hose clamp onto end of input hose, and slide end of hose onto output barbed fitting on diverter valve. Secure with hose clamp.

Slide hose clamp down gas hose from gun. Route gas hose through front panel opening, and slide hose onto remaining output barbed fitting on diverter valve. Secure with hose clamp (see Section 4-16).

Remove wrapper from unit.

5 Switch Hole In Center Baffle

Remove plug from switch hole.

6 Toggle Switch

Remove nut and locking ring from switch. Insert switch through hole and secure switch with locking ring and nut.

7 Switch Plug

8 Receptacle RC4 On Circuit Board PC1

Remove and retain jumper plug from RC4. Connect switch plug to RC4.

9 Switch Label

Operation:

Place switch in SPOOL GUN position for spool gun operation. Place switch in MIG GUN position for wire feeder/MIG (GMAW) gun operation.

When spoolgun switch is in On position, spoolgun wire feed speed is controlled by welding power source Wire Speed control.

4-16. Connecting An Optional Spool Gun

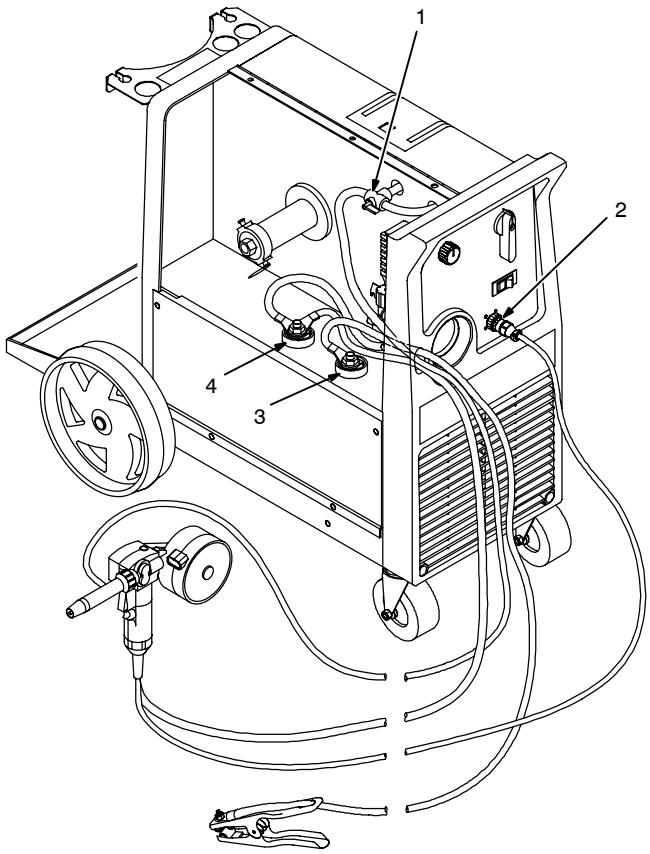

If a MIG gun is connected to the unit, remove it before connecting spool gun.

1 Diverter Valve

☞ *If spool gun gas hose is equipped with a pre-installed barbed fitting, cut off fitting from end of hose.*

Connect spool gun gas hose to diverter valve barbed fitting (see Section 4-15).

2 Gun Trigger Plug

Insert plug into receptacle, and tighten threaded collar.

3 Negative (–) Output Terminal

4 Positive (+) Output Terminal

Place toggle switch in Spool Gun position (see Section 4-15).

Close door.

803 907-B

5-1. Controls



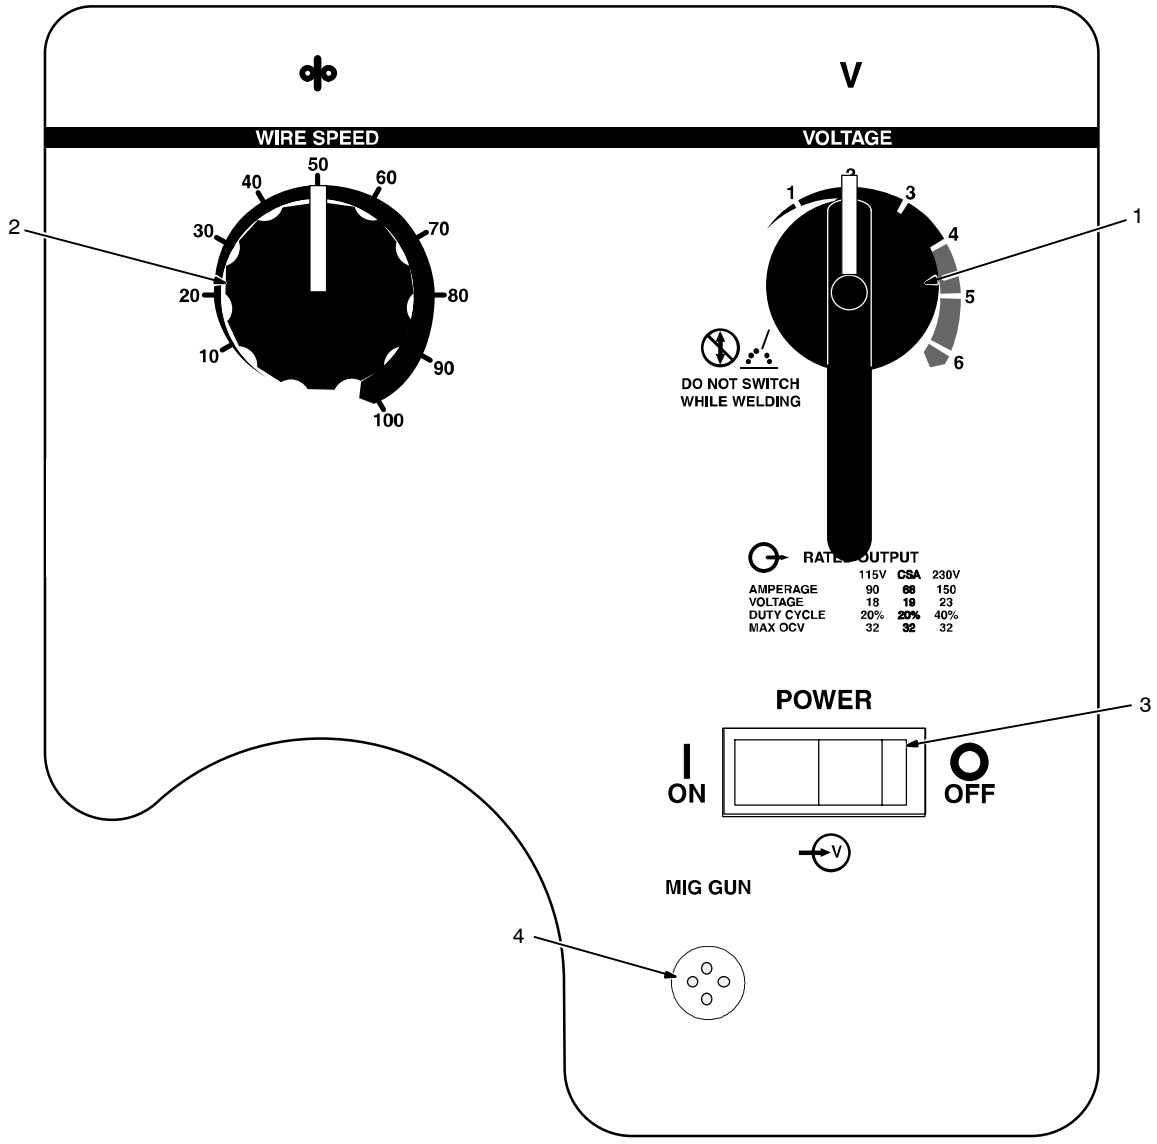

Ref. 220 079-B

1 Voltage Control

☞ *Positions 4, 5, and 6 are for 230 volts ac input only.*

Set Voltage control according to the parameter chart for good starting point. Turn control clockwise to increase voltage.

2 Wire Speed Control

Set Wire Speed control according to the parameter chart. Increase or decrease wire speed to obtain desired bead profile and travel speed.

3 Power Switch/Circuit Breaker

The switch energizes the main transformer and control circuitry. The 20 ampere circuit breaker protects the unit from overload.

4 MIG Gun Receptacle

Notes

5-2. Weld Parameter Chart

Selecting Wire, Gas and Control Settings*

What Material are You Welding?	Suggested Wire Types	Suggested Shielding Gases and Flow Rate	Wire Sizes (Diameter)
Steel	Solid (or hard) ER70S-6	100% CO_2, 25 cfh	0.023" (0.6mm) 0.030" (0.8mm) 0.035" (0.9mm)
		75% Ar/25% CO_2, 25 cfh (Ar/CO_2 produces less spatter - better overall appearance)	0.023" (0.6mm) 0.030" (0.8mm) 0.035" (0.9mm)
Steel – for outdoor, windy applications or when weld appearance is not critical.	Flux core E71T-11	No shielding gas required	0.030" (0.8mm) 0.035" (0.9mm)
Stainless steel	Stainless steel ER 308, ER 308L ER 308LSi	Tri-Mix, 35 cfh (90% He/7.5% Ar/2.5% CO_2)	0.023" (0.6mm) 0.030" (0.8mm) 0.035" (0.9mm)
Aluminum with Spoolmate™ 3035 spoolgun.	Aluminum 4043 ER	100% Ar, 25 cfh	0.030" (0.8mm) 0.035" (0.9mm)

***Line Voltage can affect Weld Output, Settings on this Chart are Starting Values Only. You may need to adjust Voltage and Wire Feed Speed to Optimize your Settings.**

Select Voltage and Wire Speed Based on Thickness of Metal Being Welded

To read settings:
First number is voltage. Second number is wire speed.
(–) Means not recommended.

3/40 Parmeter settings for 115V/230V.

5/90 Parmeter settings for 230V **ONLY.**

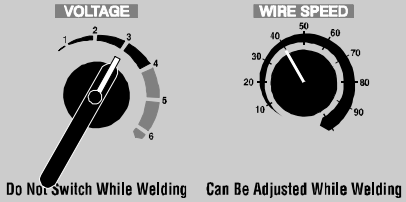

Example: 3/40

3/8" (9.5 mm)	1/4" (6.4 mm)	3/16" (4.8 mm)	1/8" (3.2 mm)	14 ga. (2.0 mm)	16 ga. (1.6 mm)	18 ga. (1.2 mm)	20 ga. (0.9 mm)	22 ga. (0.8 mm)
—	—	5/90	4/60	4/55	3/40	2/25	2/20	2/15
6/80	5/65	4/45	3/35	3/25	3/18	2/15	2/10	1/3
6/55	5/40	4/32	4/27	3/20	3/15	2/10	2/5	2/min
—	—	4/87	4/25	3/61	2/35	2/30	1/15	1/12
5/75	4/57	3/40	3/35	2/30	2/20	1/10	1/8	1/5
6/70	4/45	3/35	3/30	2/25	2/20	2/15	1/5	1/min
—	5/55	4/40	3/30	2/20	1/15	1/12	—	—
—	5/45	4/40	2/25	2/15	1/10	1/5	—	—
—	—	5/98	4/70	3/40	3/32	2/18	2/13	—
6/88	5/75	4/60	3/40	3/30	2/20	2/15	2/10	—
6/80	5/65	4/48	3/31	3/25	3/20	2/10	2/5	—
—	5/max	5/90	4/80	3/80	1/75	—	—	—
6/max	5/86	5/80	4/75	3/73	1/70	—	—	—

220 493-A

SECTION 6 – MAINTENANCE &TROUBLESHOOTING

6-1. Routine Maintenance



▲ **Disconnect power before maintaining.**

☞ *Maintain more often during severe conditions.*

3 Months

Replace unreadable labels



Repair or replace cracked weld cable

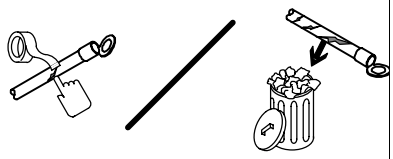

Clean and tighten weld terminals



6 Months

Blow out or vacuum inside.



Remove drive roll and carrier. Apply light coat of oil or grease to drive motor shaft.



Ref. 802 990

6-2. Circuit Breaker CB1



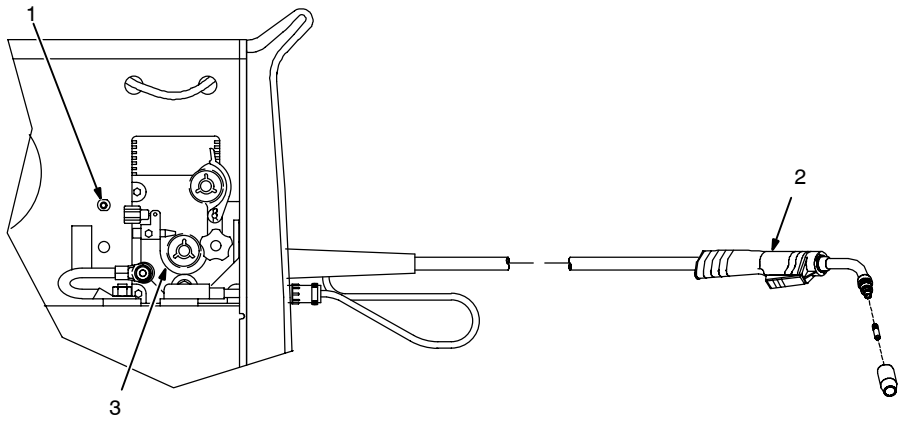

1 Circuit Breaker CB1

If CB1 opens, wire feeding stops.

2 Welding Gun

Check gun liner for blockage or kinks.

3 Wire Drive Assembly

Check for jammed wire, binding drive gear or misaligned drive rolls.

Allow cooling period and reset breaker. Close door.

Ref. 803 860-B / Ref. 802 714

6-3. Unit Overload

Thermostats TP1 in rectifier SR1 and TP2 in stabilizer Z1 protect the unit from damage due to overheating. If TP1 and/or TP2 opens welding output will shut off. Wait several minutes before trying to weld.

Circuit breaker CB2 (Power switch) protects transformer T1 from overload. If CB2 opens, unit power will shut off. Check input power supply, and press Power switch to turn unit back on.

6-4. Replacing Gun Contact Tip

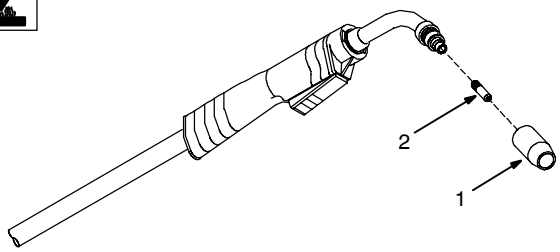

▲ **Turn Off power.**

1 Nozzle

2 Contact Tip

Cut off welding wire at contact tip. Remove nozzle.

Remove contact tip and install new contact tip. Reinstall nozzle.

Tools Needed:



Ref. 800 797-C

6-5. Changing Drive Roll and Wire Inlet Guide

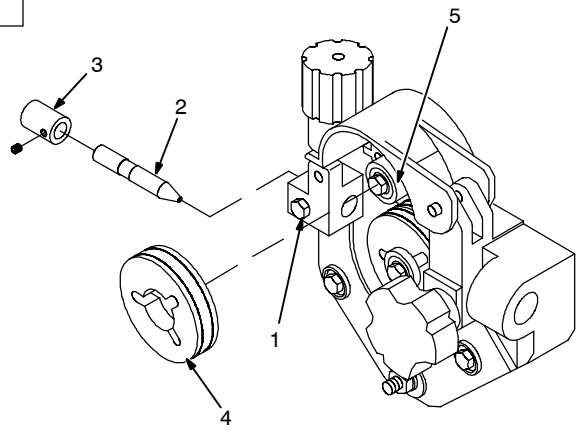

1 Securing Screw

2 Inlet Wire Guide

Loosen screw. Slide tip as close to drive rolls as possible without touching. Tighten screw.

3 Anti-Wear Guide

Install guide as shown.

4 Drive Roll

The drive roll consists of two different sized grooves. The stamped markings on the end surface of the drive roll refers to the groove on the opposite side of the drive roll. The groove closest to the motor shaft is the proper groove to thread (see Section 4-14).

Install correct drive roll for wire size and type.

5 Drive Roll Securing Nut

Turn nut one click to secure drive roll.

Tools Needed:

5/64 in



7/16 in

Ref. 802 990

6-6. Aligning Drive Rolls and Wire Guide



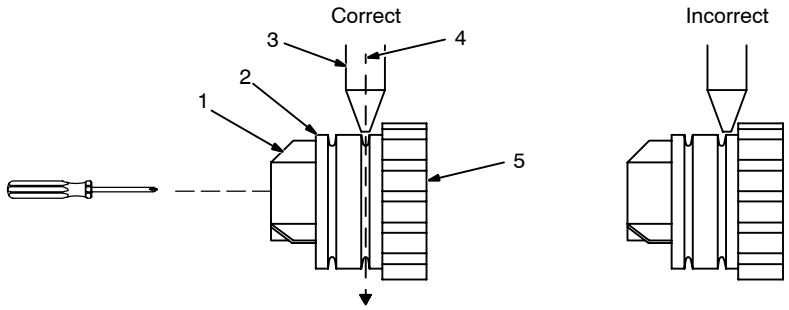

▲ **Turn Off power.**

View is from top of drive rolls looking down with pressure assembly open.

1 Drive Roll Securing Nut
2 Drive Roll
3 Wire Guide
4 Welding Wire
5 Drive Gear

Insert screwdriver, and turn screw in or out until drive roll groove lines up with wire guide.

Close pressure roll assembly.

Tools Needed:



Ref. 800 412-A

6-7. Removing Knob From Front Panel

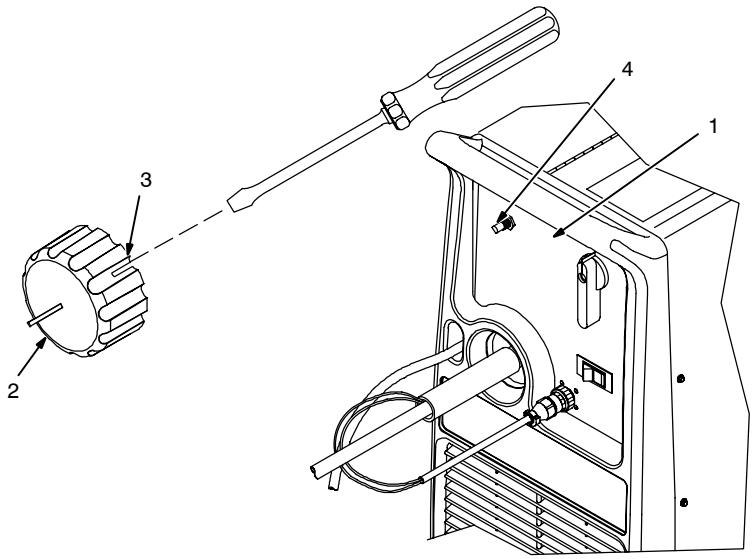

▲ **Turn Off power.**

1 Front Panel
2 Knob
3 Slot
4 Control Shaft

Rotate knob to allow access to slot. Insert tip of screwdriver into slot, and while pushing on spring clip, pull knob off control shaft.

To reinstall, push knob fully onto control shaft.

803 863-A

6-8. Cleaning Or Replacing Gun Liner

▲ **Disconnect gun from unit.**

Tools Needed:



3/8 in



1/2 in



Head Tube

Remove nozzle, contact tip, adapter, gas diffuser, and wire outlet guide.

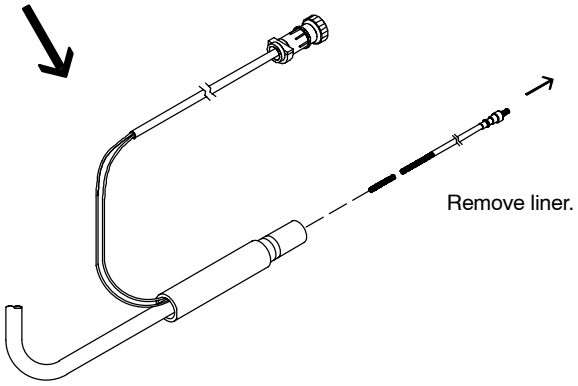

Remove liner.

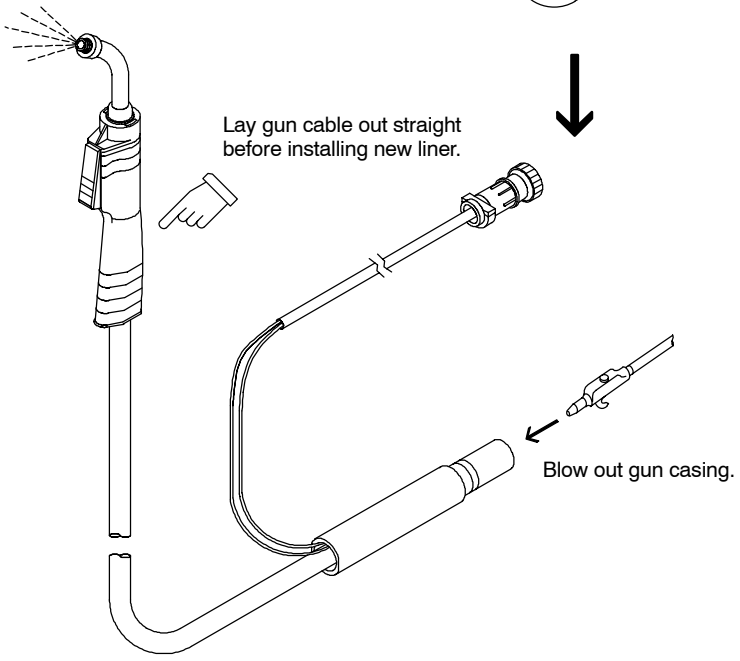

Lay gun cable out straight before installing new liner.

Blow out gun casing.

To Reassemble Gun:

Install and tighten new liner.

Cut liner off 3/4 in (20 mm) (3/8 in [9.5 mm] for aluminum) from head tube.

Install adapter, contact tip, and nozzle.

Ref. 802 399-A

6-9. Replacing Switch And/Or Head Tube

▲ **Disconnect gun first.**

1 Remove handle locking nut.

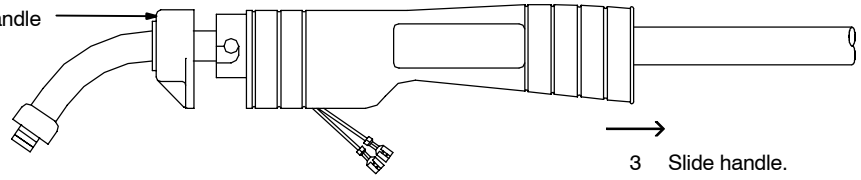

3 Slide handle.



2 Remove switch housing. Note**:** If installing new switch, push switch lead connectors onto terminal of new switch (polarity is not important). Install switch back into handle, and secure with handle locking nut. If replacing head tube, continue to end of figure.

4 Secure head tube in vice.

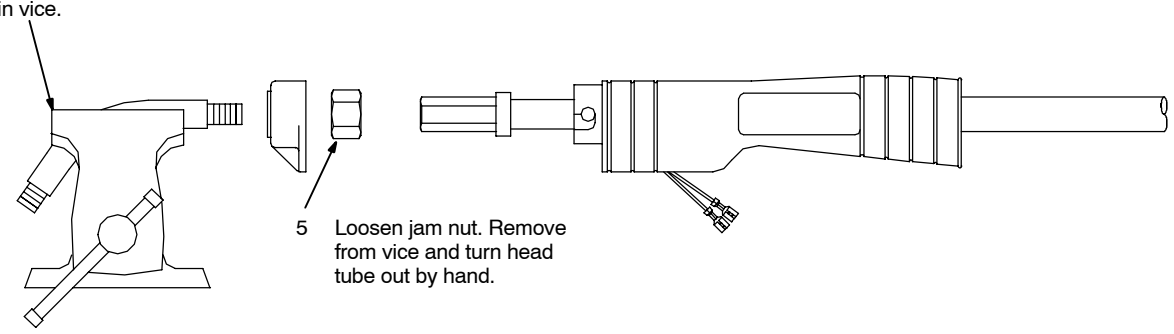

5 Loosen jam nut. Remove from vice and turn head tube out by hand.

6 Install existing shock washer onto new head tube. Hand-tighten head tube into connector cable.

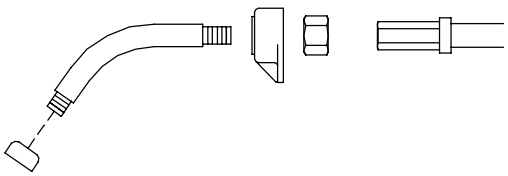

7 Place head tube in vice and tighten until nuts are tight.

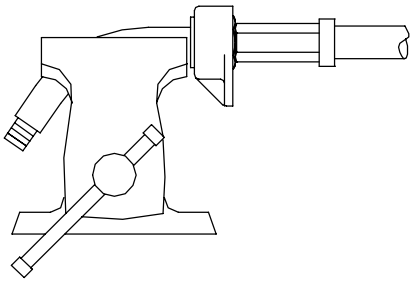

8 Remove from vice. Reposition handle and install switch housing. Secure with handle locking nut.

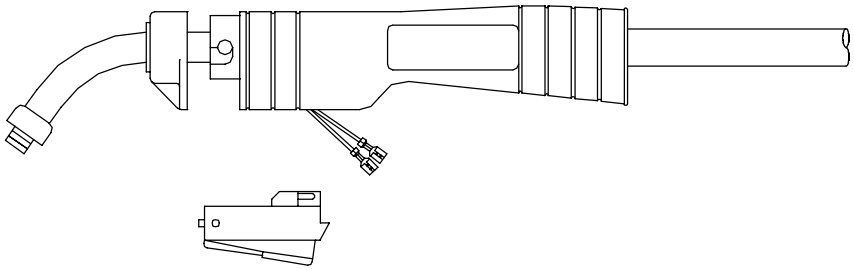

Tools Needed:

3/4 in

Ref. 800 795-C

6-10. Troubleshooting



Welding Trouble	Remedy
No weld output; wire does not feed.	Secure power cord plug in receptacle (see Section 4-13).
	Check power switch/circuit breaker, and reset if necessary. If circuit breaker is not tripped, replace power switch.
	Check circuit breaker CB1, and reset if necessary (see Section 6-2).
	Replace building line fuse or reset circuit breaker if open (see Section 4-13).
	Secure gun plug in receptacle or repair leads, or replace trigger switch (see Section 4-6 and/or 6-9).
	Thermostat TP1 or TP2 open (overheating). Allow fan to run; the thermostat will close when the unit has cooled (see Section 6-3).
No weld output; wire feeds.	Connect work clamp to get good metal to metal contact.
	Replace contact tip (see Section 6-4).
Low weld output.	Connect unit to proper input voltage or check for low line voltage (see Section 4-13).
Low, high, or erratic wire speed.	Readjust front panel settings (see Section 5-1).
	Change to correct size drive roll (see Section 6-5).
	Readjust drive roll pressure (see Section 4-14).
	Replace inlet guide, contact tip, and/or liner if necessary (see Sections 6-4, and 6-8).
Wire Drive/Gun Trouble	**Remedy**
Electrode wire feeding stops during welding.	Straighten gun cable and/or replace damaged parts (see Section 6-8).
	Adjust drive roll pressure (see Section 4-14).
	Readjust hub tension (see Section 4-9).
	Replace contact tip if blocked (see Section 6-4).
	Clean or replace wire inlet guide or liner if dirty or plugged (see Section 6-8).
	Replace drive roll if worn or slipping (see Section 6-5).
	Secure gun plug in receptacle or repair leads, or replace trigger switch (see Section 4-6 and/or 6-9).
	Check and clear any restrictions at drive assembly and liner (see Section 6-8).
	Have nearest Factory Authorized Service Agent check drive motor.

SECTION 7 – ELECTRICAL DIAGRAM

⚠ WARNING	• Do not touch live electrical parts. • Disconnect input power or stop engine before servicing. • Do not operate with covers removed. • Have only qualified persons install, use, or service this unit.
ELECTRIC SHOCK HAZARD	

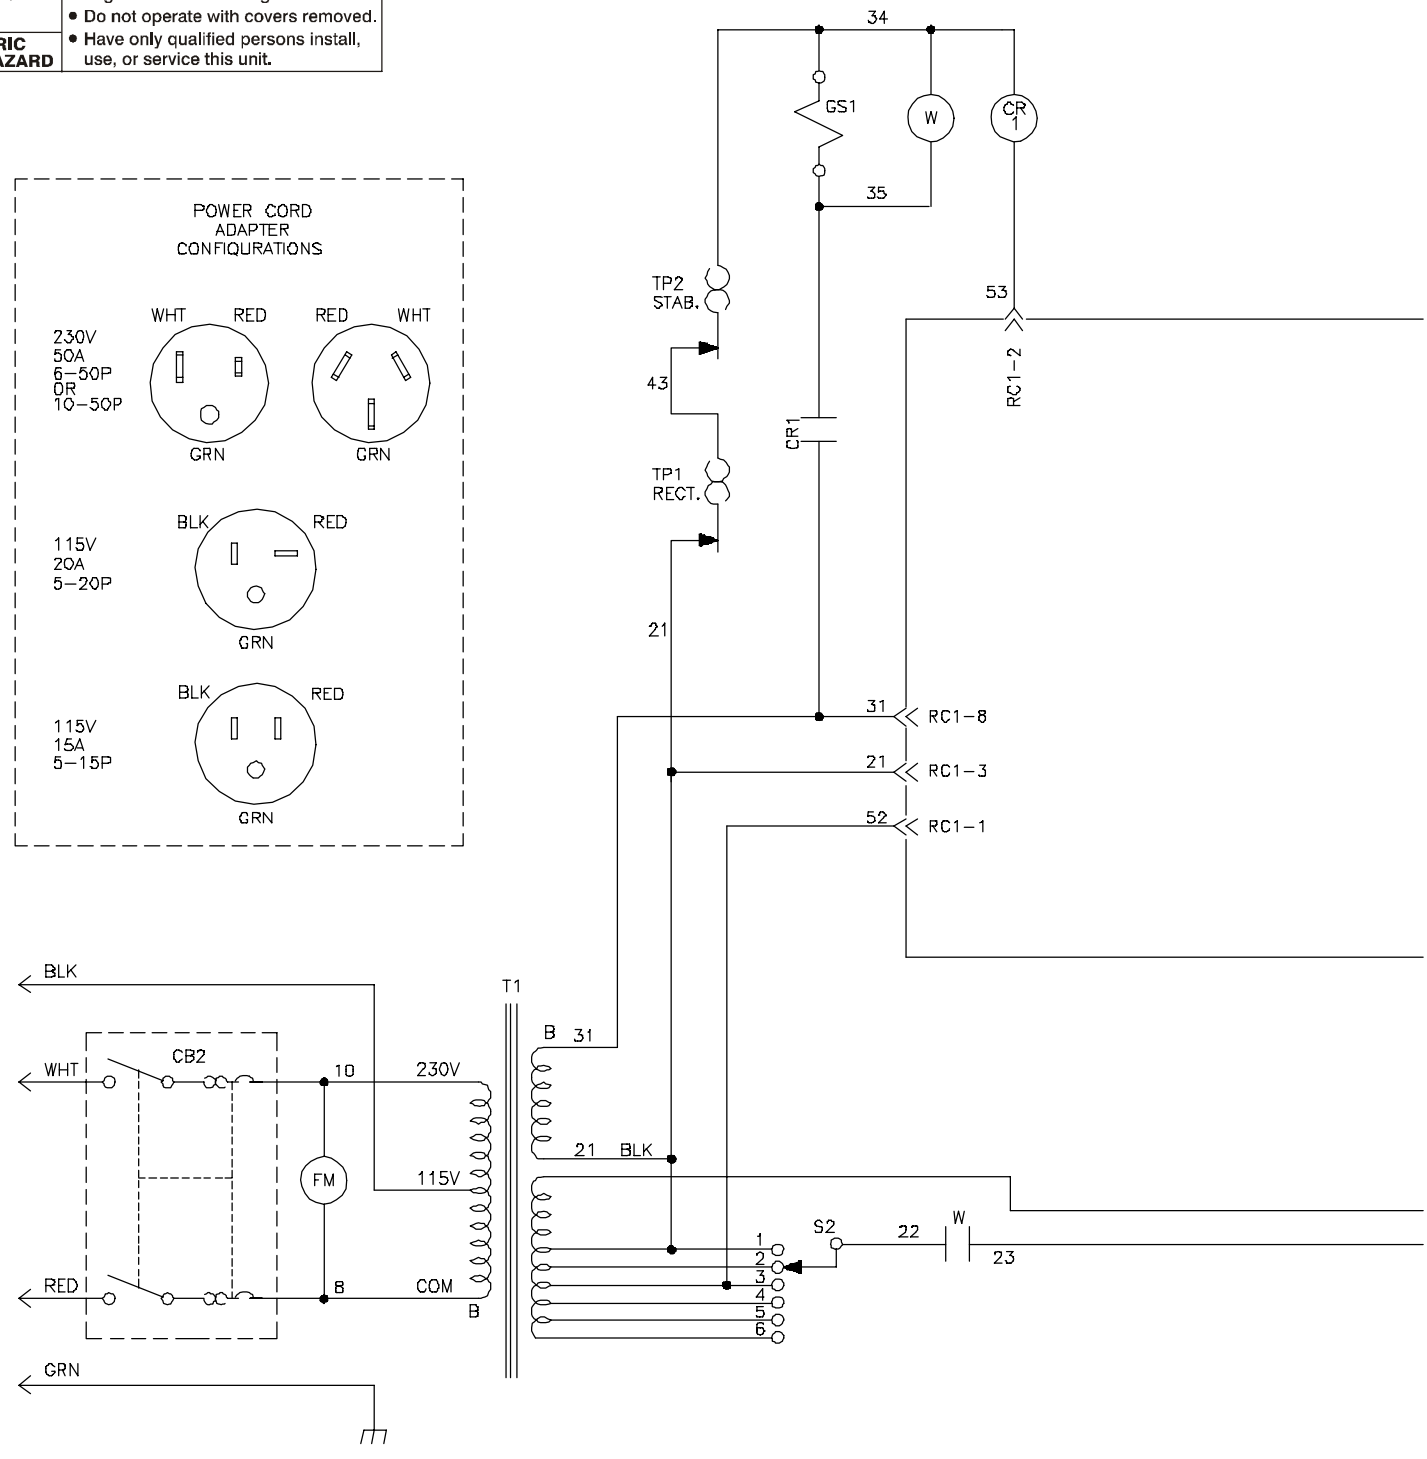

Figure 7-1. Welding Power Source Circuit Diagram

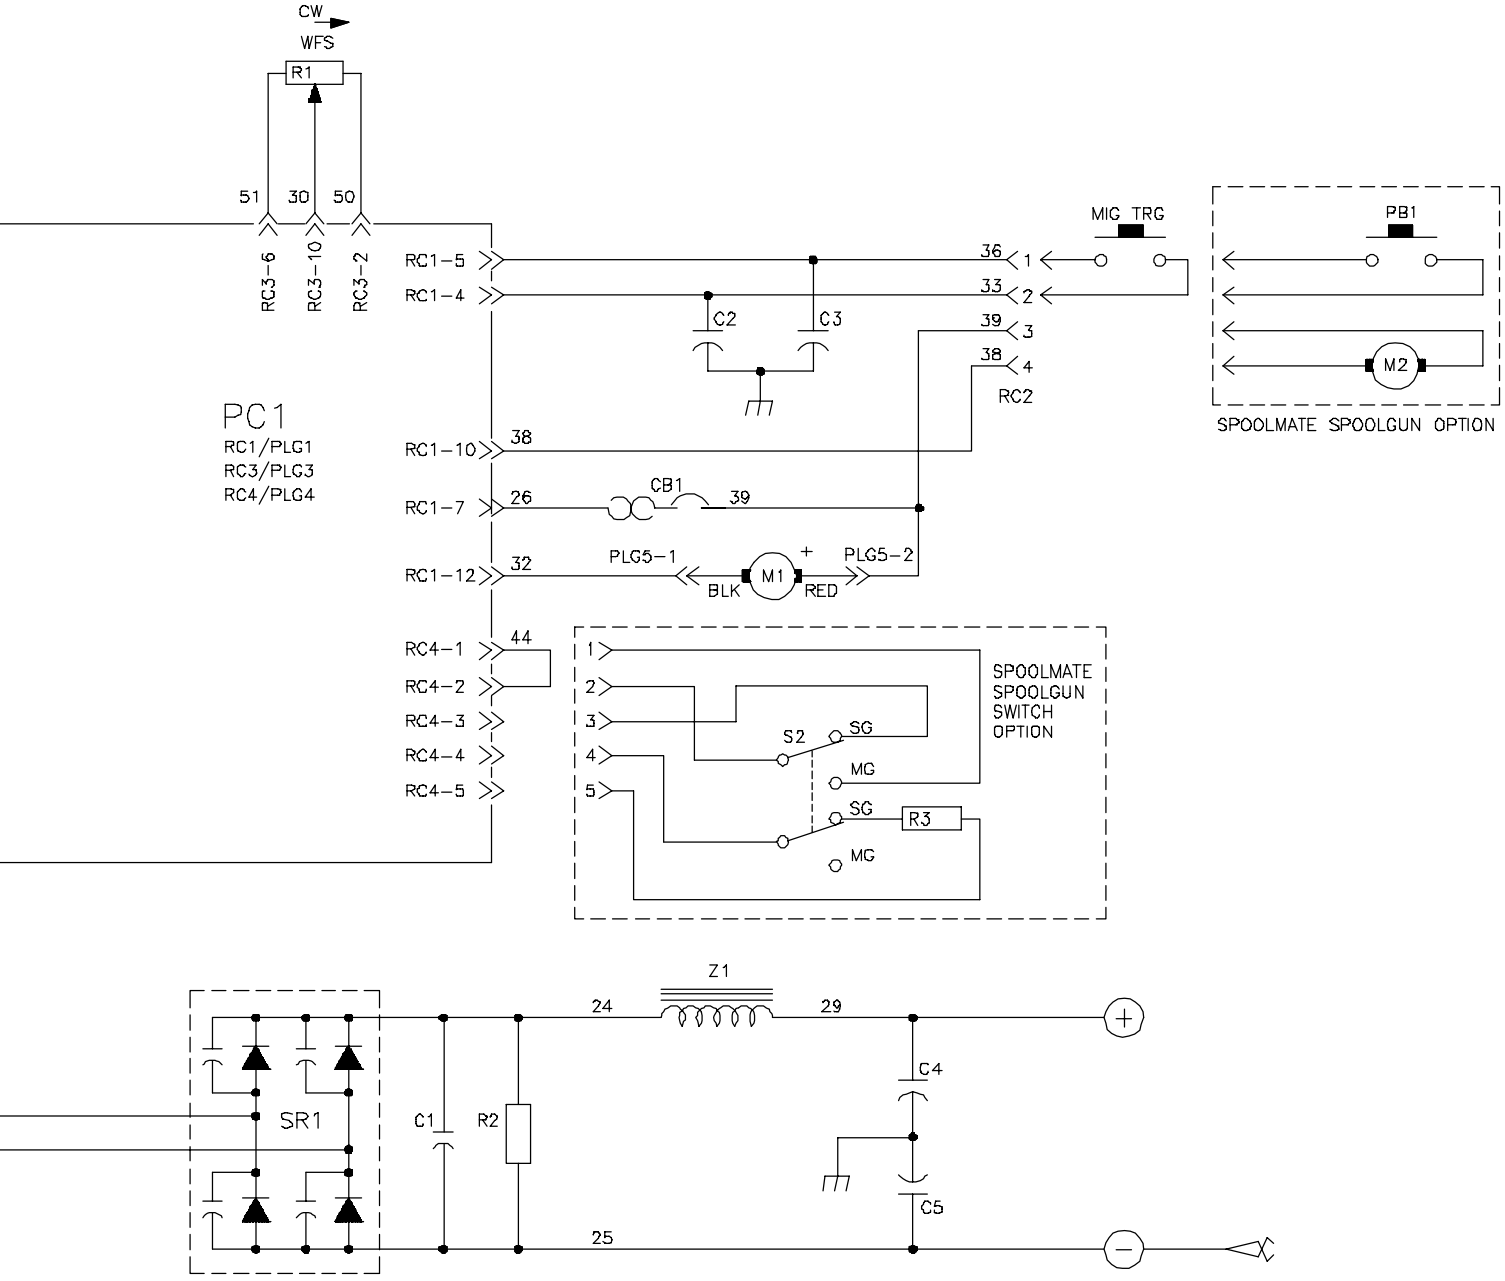
CW
WFS
R1
51
30
50
RC3-6
RC3-10
RC3-2
RC1-5
RC1-4
C2
C3
36
1
33
2
39
3
38
4
RC2
MIG TRG
PB1
M2
SPOOLMATE SPOOLGUN OPTION
PC1
RC1/PLG1
RC3/PLG3
RC4/PLG4
RC1-10
38
RC1-7
26
CB1
39
RC1-12
32
PLG5-1
M1
+
PLG5-2
BLK
RED
RC4-1
44
RC4-2
RC4-3
RC4-4
RC4-5
1
2
3
4
5
S2
SG
MG
SG
R3
MG
SPOOLMATE
SPOOLGUN
SWITCH
OPTION
Z1
24
29
SR1
C1
R2
C4
C5
25
+
-

220 197-B

SECTION 8 – MIG WELDING (GMAW) GUIDELINES

8-1. Typical MIG Process Connections

▲ **Weld current can damage electronic parts in vehicles. Disconnect both battery cables before welding on a vehicle. Place work clamp as close to the weld as possible.**

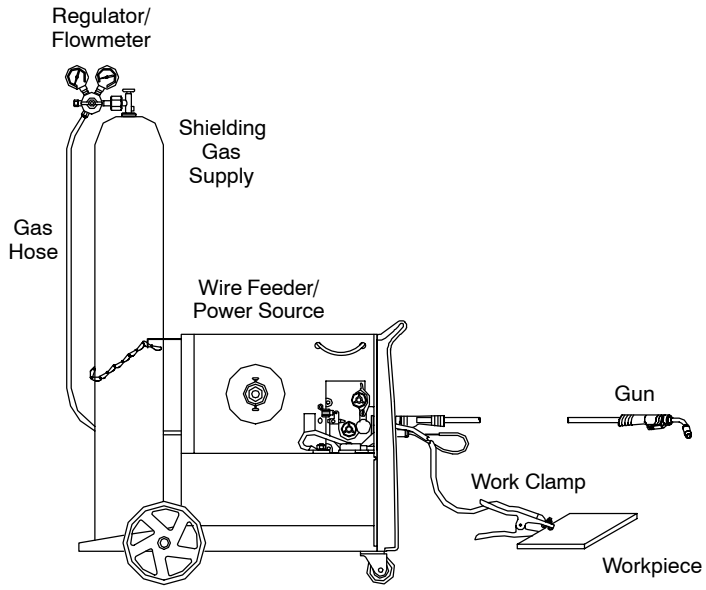

light mig 5/967 / Ref. 802 714 / Ref. 802 064-C

8-2. Typical MIG Process Control Settings

NOTE ☞ *These settings are guidelines only. Material and wire type, joint design, fitup, position, shielding gas, etc. affect settings. Test welds to be sure they comply to specifications.*

Material thickness determines weld parameters.



Convert Material Thickness to Amperage (A)

(.001 in = 1 ampere)
.125 in = 125 A



Wire Size	Amperage Range
.023 in	30 – 90 A
.030 in	40 – 145 A
.035 in	50 – 180 A

Select Wire Size

Wire Size	Recommendation	Wire Speed (Approx.)
.023 in	3.5 in per ampere	3.5 x 125 A = 437 ipm
.030 in	2 in per ampere	2 x 125 A = 250 ipm
.035 in	1.6 in per ampere	1.6 x 125 A = 200 ipm

Select Wire Speed (Amperage)

125 A based on 1/8 in material thickness

ipm = inch per minute

Low voltage: wire stubs into work

High voltage: arc is unstable (spatter)

Set voltage midway between high/low voltage.

Select Voltage

Voltage controls height and width of weld bead.

Wire speed (amperage) controls weld penetration (wire speed = burn-off rate)

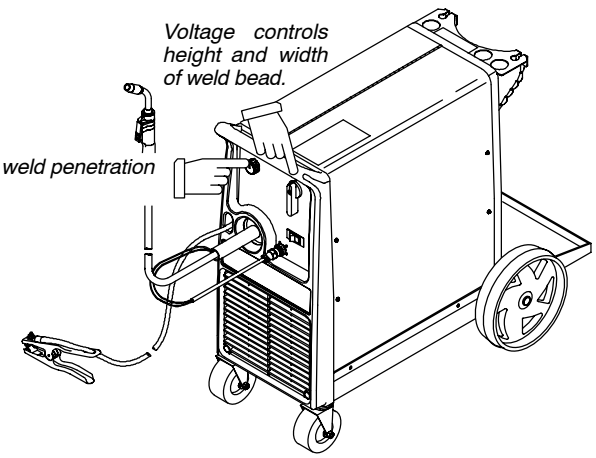

803 858-B

8-3. Holding And Positioning Welding Gun

NOTE ☞

Welding wire is energized when gun trigger is pressed. Before lowering helmet and pressing trigger, be sure wire is no more than 1/2 in (13 mm) past end of nozzle, and tip of wire is positioned correctly on seam.

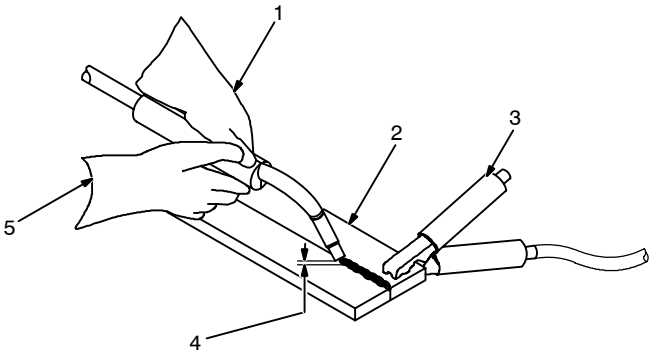

1 Hold Gun and Control Gun Trigger
2 Workpiece
3 Work Clamp
4 Electrode Extension (Stickout) 1/4 to 1/2 in (6 To 13 mm)
5 Cradle Gun and Rest Hand on Workpiece

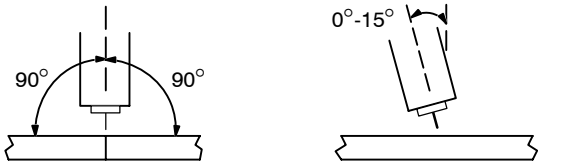

End View Of Work Angle — Side View Of Gun Angle

GROOVE WELDS

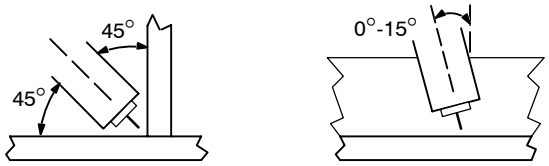

End View Of Work Angle — Side View Of Gun Angle

FILLET WELDS

S-0421-A

8-4. Conditions That Affect Weld Bead Shape

NOTE ☞

Weld bead shape depends on gun angle, direction of travel, electrode extension (stickout), travel speed, thickness of base metal, wire feed speed (weld current), and voltage.

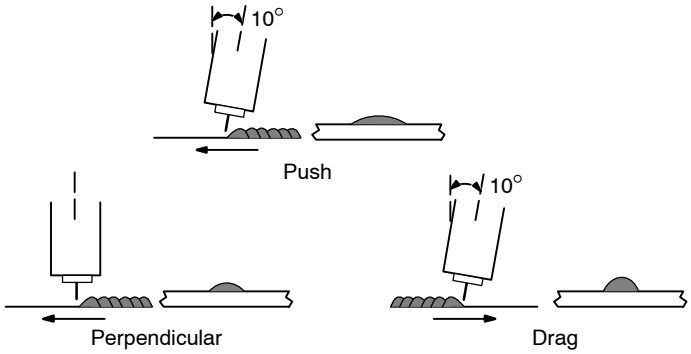

GUN ANGLES AND WELD BEAD PROFILES

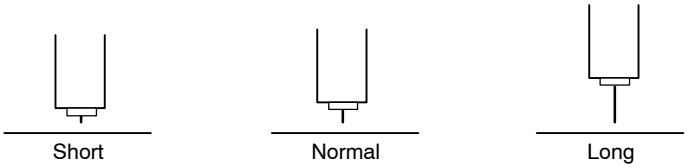

ELECTRODE EXTENSIONS (STICKOUT)

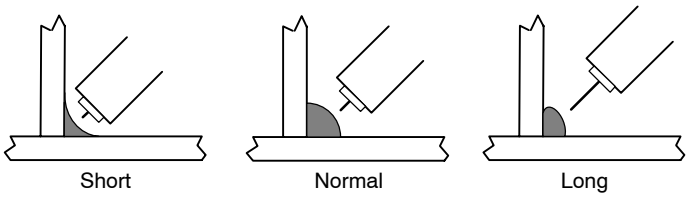

FILLET WELD ELECTRODE EXTENSIONS (STICKOUT)



GUN TRAVEL SPEED

S-0634

8-5. Gun Movement During Welding

NOTE ☞

Normally, a single stringer bead is satisfactory for most narrow groove weld joints; however, for wide groove weld joints or bridging across gaps, a weave bead or multiple stringer beads works better.

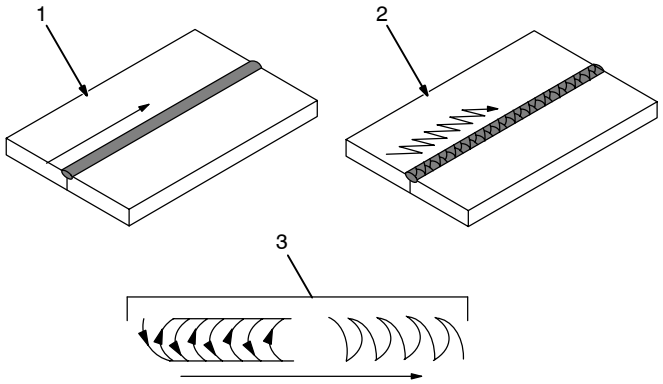

1 Stringer Bead – Steady Movement Along Seam

2 Weave Bead – Side To Side Movement Along Seam

3 Weave Patterns

Use weave patterns to cover a wide area in one pass of the electrode.

S-0054-A

8-6. Poor Weld Bead Characteristics

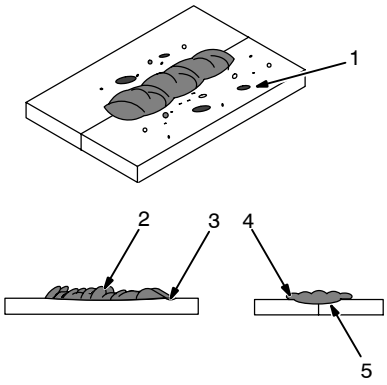

1 Large Spatter Deposits

2 Rough, Uneven Bead

3 Slight Crater During Welding

4 Bad Overlap

5 Poor Penetration

S-0053-A

8-7. Good Weld Bead Characteristics

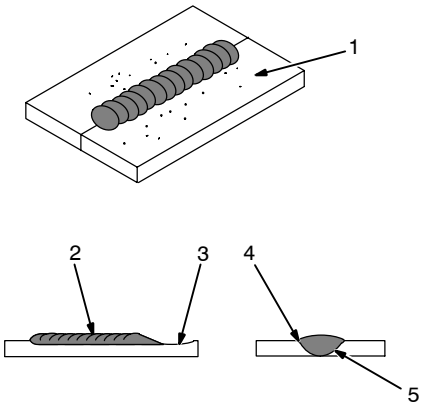

1 Fine Spatter

2 Uniform Bead

3 Moderate Crater During Welding

Weld a new bead or layer for each 1/8 in (3.2 mm) thickness in metals being welded.

4 No Overlap

5 Good Penetration into Base Metal

S-0052-B

8-8. Troubleshooting – Excessive Spatter



Excessive Spatter – scattering of molten metal particles that cool to solid form near weld bead.

S-0636

Possible Causes	Corrective Actions
Wire feed speed too high.	Select lower wire feed speed.
Voltage too high.	Select lower voltage range.
Electrode extension (stickout) too long.	Use shorter electrode extension (stickout).
Workpiece dirty.	Remove all grease, oil, moisture, rust, paint, undercoating, and dirt from work surface before welding.
Insufficient shielding gas at welding arc.	Increase flow of shielding gas at regulator/flowmeter and/or prevent drafts near welding arc.
Dirty welding wire.	Use clean, dry welding wire.
	Eliminate pickup of oil or lubricant on welding wire from feeder or liner.

8-9. Troubleshooting – Porosity

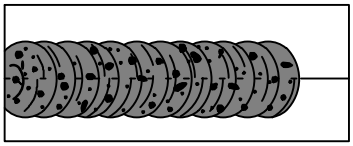

Porosity – small cavities or holes resulting from gas pockets in weld metal.

S-0635

Possible Causes	Corrective Actions
Insufficient shielding gas at welding arc.	Increase flow of shielding gas at regulator/flowmeter and/or prevent drafts near welding arc.
	Remove spatter from gun nozzle.
	Check gas hoses for leaks.
	Place nozzle 1/4 to 1/2 in (6-13 mm) from workpiece.
	Hold gun near bead at end of weld until molten metal solidifies.
Wrong gas.	Use welding grade shielding gas; change to different gas.
Dirty welding wire.	Use clean, dry welding wire.
	Eliminate pick up of oil or lubricant on welding wire from feeder or liner.
Workpiece dirty.	Remove all grease, oil, moisture, rust, paint, coatings, and dirt from work surface before welding.
	Use a more highly deoxidizing welding wire (contact supplier).
Welding wire extends too far out of nozzle.	Be sure welding wire extends not more than 1/2 in (13 mm) beyond nozzle.

8-10. Troubleshooting – Excessive Penetration



Excessive Penetration Good Penetration

Excessive Penetration – weld metal melting through base metal and hanging underneath weld.

S-0639

Possible Causes	Corrective Actions
Excessive heat input.	Select lower voltage range and reduce wire feed speed.
	Increase travel speed.

8-11. Troubleshooting – Lack Of Penetration



Lack Of Penetration – shallow fusion between weld metal and base metal.

S-0638

Possible Causes	Corrective Actions
Improper joint preparation.	Material too thick. Joint preparation and design must provide access to bottom of groove while maintaining proper welding wire extension and arc characteristics.
Improper weld technique.	Maintain normal gun angle of 0 to 15 degrees to achieve maximum penetration.
	Keep arc on leading edge of weld puddle.
	Be sure welding wire extends not more than 1/2 in (13 mm) beyond nozzle.
Insufficient heat input.	Select higher wire feed speed and/or select higher voltage range.
	Reduce travel speed.
Incorrect polarity.	Check polarity required by welding wire, and change to correct polarity at welding power source.

8-12. Troubleshooting – Incomplete Fusion

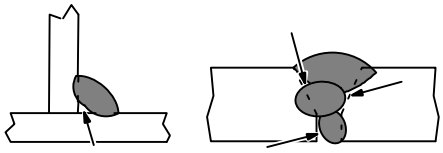

Incomplete Fusion – failure of weld metal to fuse completely with base metal or a preceeding weld bead.

S-0637

Possible Causes	Corrective Actions
Workpiece dirty.	Remove all grease, oil, moisture, rust, paint, undercoating, and dirt from work surface before welding.
Insufficient heat input.	Select higher voltage range and/or adjust wire feed speed.
Improper welding technique.	Place stringer bead in proper location(s) at joint during welding.
	Adjust work angle or widen groove to access bottom during welding.
	Momentarily hold arc on groove side walls when using weaving technique.
	Keep arc on leading edge of weld puddle.
	Use correct gun angle of 0 to 15 degrees.

8-13. Troubleshooting – Burn-Through



Burn-Through – weld metal melting completely through base metal resulting in holes where no metal remains.

S-0640

Possible Causes	Corrective Actions
Excessive heat input.	Select lower voltage range and reduce wire feed speed.
	Increase and/or maintain steady travel speed.

8-14. Troubleshooting – Waviness Of Bead

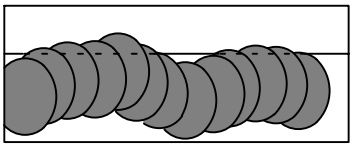

Waviness Of Bead – weld metal that is not parallel and does not cover joint formed by base metal.

S-0641

Possible Causes	Corrective Actions
Welding wire extends too far out of nozzle.	Be sure welding wire extends not more than 1/2 in (13 mm) beyond nozzle.
Unsteady hand.	Support hand on solid surface or use two hands.

8-15. Troubleshooting – Distortion



Distortion – contraction of weld metal during welding that forces base metal to move.

S-0642

Possible Causes	Corrective Actions
Excessive heat input.	Use restraint (clamp) to hold base metal in position.
	Make tack welds along joint before starting welding operation.
	Select lower voltage range and/or reduce wire feed speed.
	Increase travel speed.
	Weld in small segments and allow cooling between welds.

8-16. Common MIG Shielding Gases

This is a general chart for common gases and where they are used. Many different combinations (mixtures) of shielding gases have been developed over the years. The most commonly used shielding gases are listed in the following table.

Gas	Application			
	Spray Arc Steel	Short Circuiting Steel	Short Circuiting Stainless Steel	Aluminum
Argon				X
Argon + 25% CO_2		X		
80% or greater Argon + balance CO_2 or Oxygen	X	X[1]		
100% CO_2		X		
Tri-Mix[2]			X	

1 Limited short circuiting use

2 90% HE + 7-1/2% AR + 2-1/2% CO_2

8-17. Troubleshooting Guide For Semiautomatic Welding Equipment

Problem	Probable Cause	Remedy
Wire feed motor operates, but wire does not feed.	Too little pressure on wire feed rolls.	Increase pressure setting on wire feed rolls.
	Incorrect wire feed rolls.	Check size stamped on wire feed rolls, replace to match wire size and type if necessary.
	Wire spool brake pressure too high.	Decrease brake pressure on wire spool.
	Restriction in the gun and/or assembly.	Check and replace cable, gun, and contact tip if damaged. Check size of contact tip and cable liner, replace if necessary.
Wire curling up in front of the wire feed rolls (bird nesting).	Too much pressure on wire feed rolls.	Decrease pressure setting on wire feed rolls.
	Incorrect cable liner or gun contact tip size.	Check size of contact tip and check cable liner length and diameter, replace if necessary.
	Gun end not inserted into drive housing properly.	Loosen gun securing bolt in drive housing and push gun end into housing just enough so it does not touch wire feed rolls.
	Dirty or damaged (kinked) liner.	Replace liner.
Wire feeds, but no gas flows.	Gas cylinder empty.	Replace empty gas cylinder.
	Gas nozzle plugged.	Clean or replace gas nozzle.
	Gas cylinder valve not open or flowmeter not adjusted.	Open gas valve at cylinder and adjust flow rate.
	Restriction in gas line.	Check gas hose between flowmeter and wire feeder, and gas hose in gun and cable assembly.
	Loose or broken wires to gas solenoid.	Have Factory Authorized Service Agent repair wiring.
	Gas solenoid valve not operating.	Have Factory Authorized Service Agent replace gas solenoid valve.
	Incorrect primary voltage connected to welding power source.	Check primary voltage and relink welding power source for correct voltage.

Problem	Probable Cause	Remedy
Welding arc not stable.	Wire slipping in drive rolls.	Adjust pressure setting on wire feed rolls. Replace worn drive rolls if necessary.
	Wrong size gun liner or contact tip.	Match liner and contact tip to wire size and type.
	Incorrect voltage setting for selected wire feed speed on welding power source.	Readjust welding parameters.
	Loose connections at the gun weld cable or work cable.	Check and tighten all connections.
	Gun in poor shape or loose connection inside gun.	Repair or replace gun as necessary.

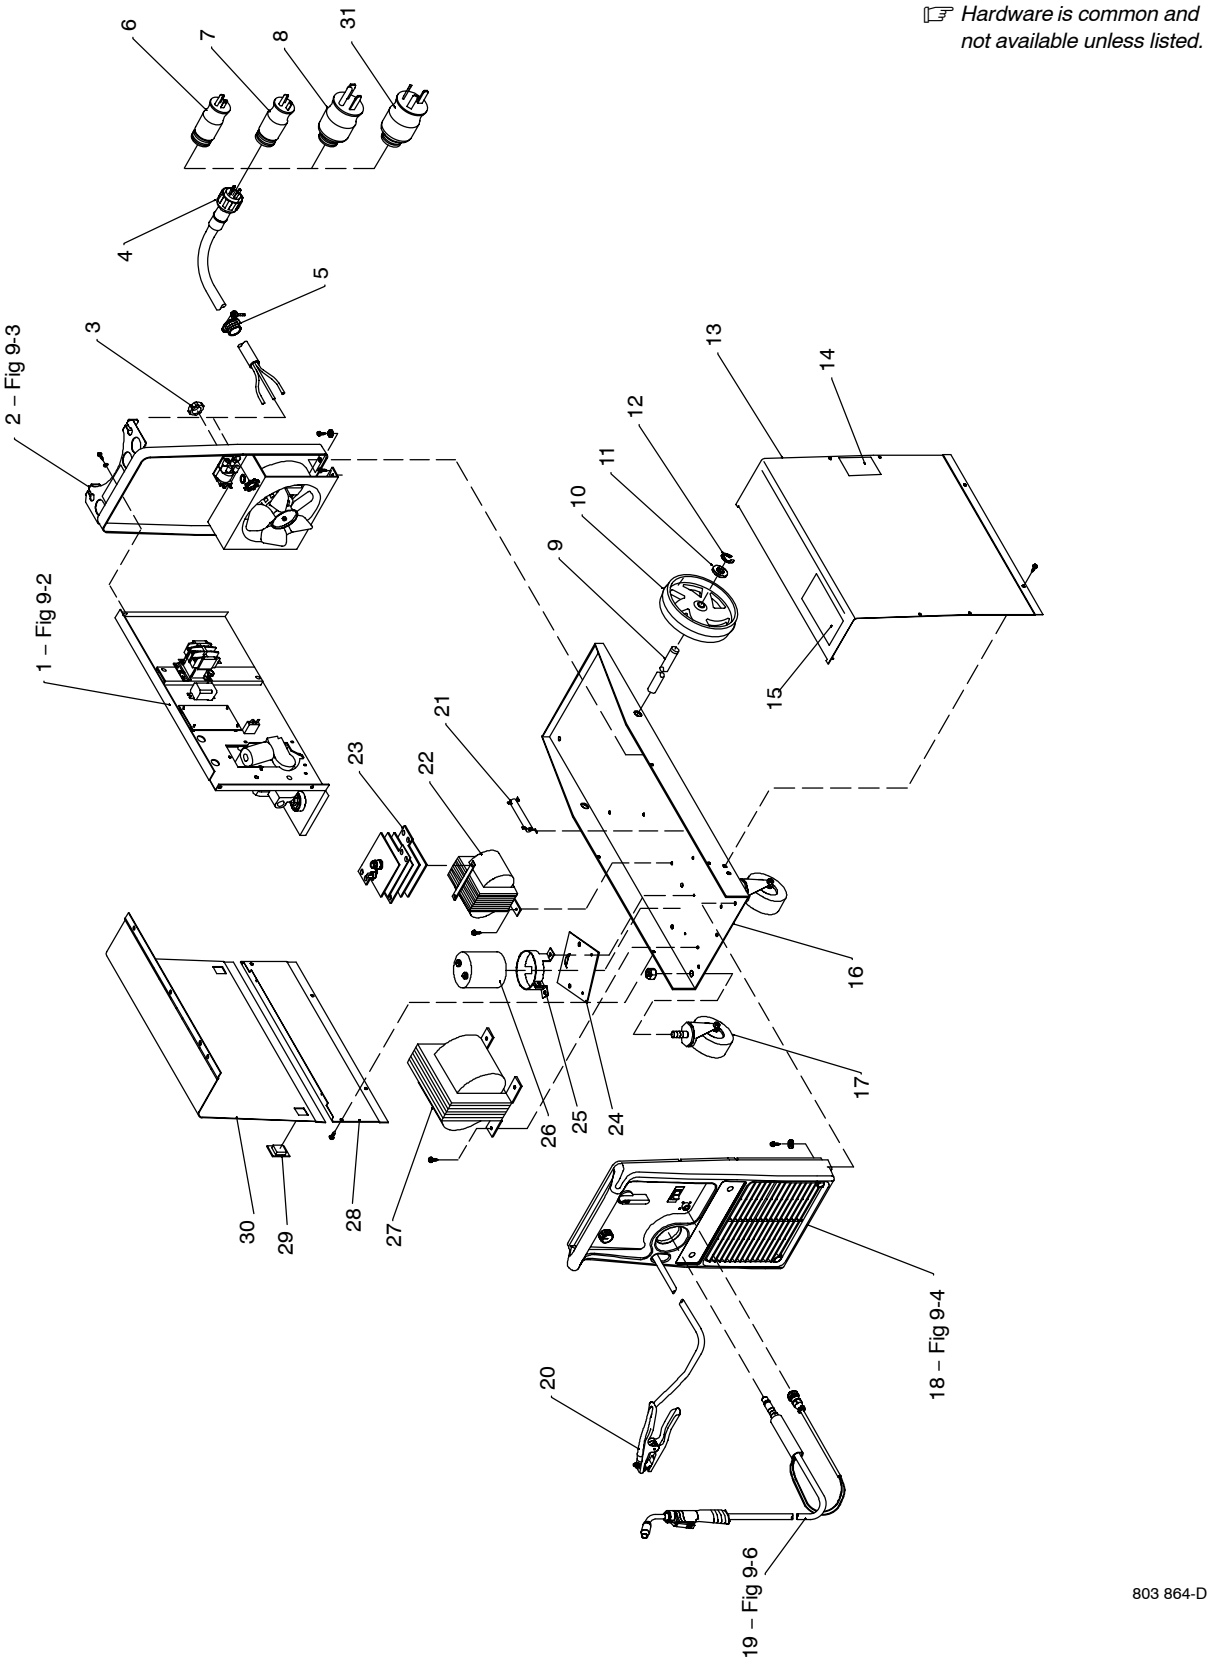

Figure 9-1. Main Assembly

Item No.	Dia. Mkgs.	Part No.	Description	Quantity

Figure 9-1. Main Assembly

1		Fig 9-2	BAFFLE,CENTER	1
2		Fig 9-3	PANEL,REAR	1
3		137761	NUT, 750 NPT 1.31HEX .27H NYL BLK	2
4		219257	CABLE,POWER 12 FT 5 IN 12GA 4C SOOW W/SPL PLUG	1
5		604102	CONN,CLAMP CABLE 1.000	1
6		219258	ADAPTER,POWER CABLE 6–50P	1
7		219261	ADAPTER,POWER CABLE 5–15P	1
8		♦219259	ADAPTER,POWER CABLE 5–20P	1
9		052692	AXLE,RUNNING GEAR .750 DIA X 25.745 (INCLUDING)	1
10		186758	WHEEL	2
11		602250	WASHER,FLAT STL SAE .750	2
12		121614	RING,RTNG EXT .750 SHAFT X .085 THK E STYLE	2
13		206579	+WRAPPER,	1
14		193328	LABEL,WARNING ELECTRIC SHOCK AND INCORRECT INPUT P	1
15		134464	LABEL,WARNING GENERAL PRECAUTIONARY STATIC&WIRE FE	1
16		146161	BASE,	1
17		209870	CASTER,SWVL 4.00 IN X 1.250 IN POLY–OLEFIN	2
18		Fig 9-4	PANEL,FRONT	1
19		Fig 9-6	M-10 GUN 12 FT .030-.035	1
20		196328	CABLE,WORK 10’ NO 3 W/CLAMP (INCLUDING)	1
		130750	CLAMP,WORK 300 AMP	1
		600318	CABLE,WELD COP STRD NO 3 EPDM JKT (ORDER BY FT)	10FT
		196318	COVER,CABLE BTRY POST BLK .75 ID	1
21	R2	091685	RESISTOR,WW FXD 50 W 25 OHM FASTON TE	1
22	Z1	219549	STABILIZER (INCLUDING)	1
	TP2	213414	THERMOSTAT,NC OPEN 150C	1
23	SR1	219553	RECTIFIER,SI 1PH 150 AMP 400 PIV 40% DUTY	1
24		218998	PLATE,MOUNTING CAPACITOR BRACKET	1
25		022160	CLAMP,CAPACITOR 3.000 DIA VERTICAL MTG	1
26	C1	199187	CAPACITOR,ELCTLT 120000 UF 35 VDC CAN 3.02 DIA	1
27	T1	219548	XFMR,POWER MAIN 115/230	1
28		203481	PANEL,SIDE LH	1
29		151187	LATCH,SLIDE FLUSH STYLE SERIES 40	2
30		203480	DOOR,HINGED	1
31		♦220900	ADAPTER,POWER CABLE 10–50P	1
		220493	LABEL,PARAMETER	1
		209123	REGULATOR/FLOWMETER, 10-50 CFH Argon/Mixed	1
		144108	HOSE, gas	1
		♦212492	REGULATOR/FLOWMETER, 10-50 CFH CO_2	1

+When ordering a component originally displaying a precautionary label, the label should also be ordered.

♦OPTIONAL

To maintain the factory original performance of your equipment, use only Manufacturer’s Suggested Replacement Parts. Model and serial number required when ordering parts from your local distributor.

☞ *Hardware is common and not available unless listed.*

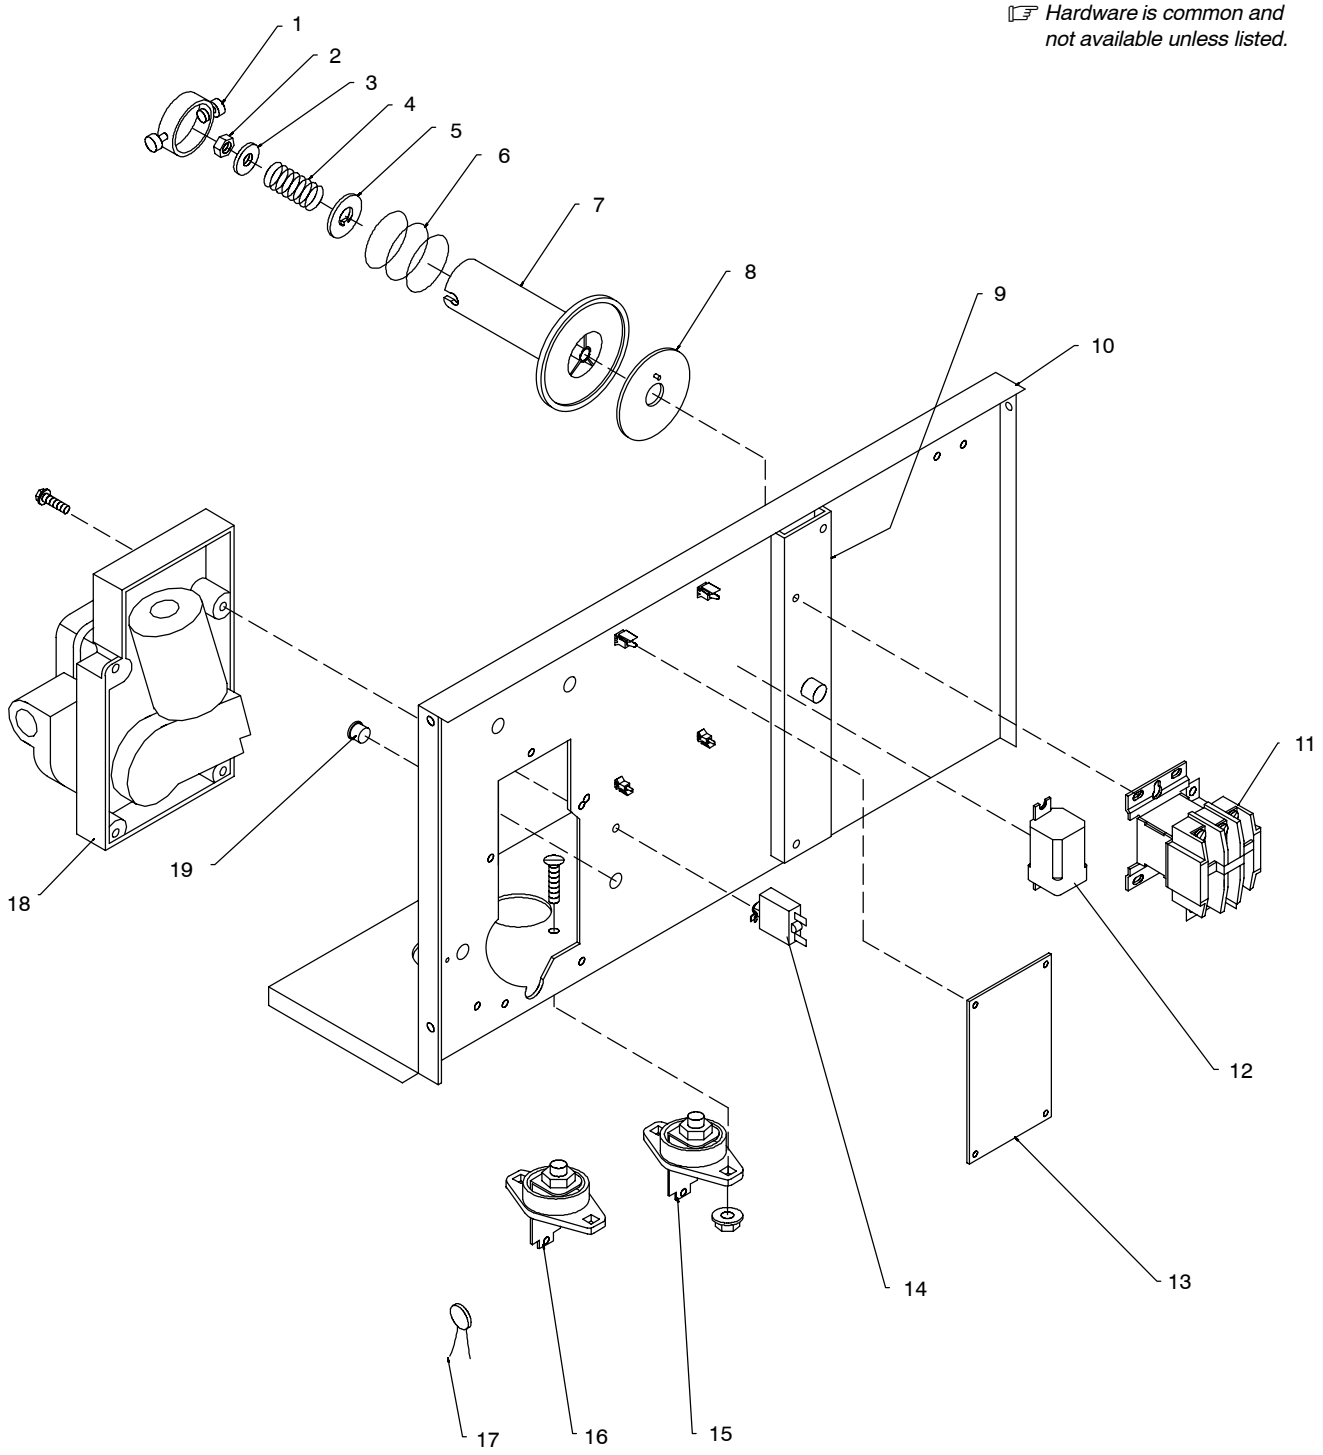

Figure 9-2. Baffle, Center w/Components

Item No.	Dia. Mkgs.	Part No.	Description	Quantity

Figure 9-2. Baffle, Center w/Components (Fig 9-1 Item 1)

			SPOOL HUB ASSEMBLY (INCLUDING)	1
1		058427	RING,RETAINING SPOOL	1
2		085980	NUT,STL HEX FULL .625-11	1
3		605941	WASHER,FLAT STL .640 ID X 1.000 OD X 14GA THK	1
4		186437	SPRING,CPRSN .845 OD X .110 WIRE X 1.500	1
5		057971	WASHER,FLAT STL KEYED 1.500DIA X .125THK	1
6		057745	SPRING,CPRSN 2.430 OD X .090 WIRE X 2.500	1
7		186435	HUB,SPOOL	1
8		186436	WASHER,BRAKE PLASTIC	1
9		177307	REEL SUPPORT	1
		198425	CAP,FINISHING 1.19 X .37	2
		198426	WASHER,CAP	2
10		+218996	BAFFLE,CENTER	1
11	W	189486	CONTACTOR,DEF PRP 40A 3P 24VAC COIL W/LINKS	1
		034260	LINK,CONNECTING CONTACTOR TERMINAL	2
12	CR1	072817	RELAY,ENCL 24VAC DPDT 20A/120VAC 8PIN FLANGE MTG	1
13	PC1	220005	CIRCUIT CARD ASSY	1
	PLG1	130203	HOUSING PLUG+SKTS,(SERVICE KIT)	1
	PLG3	115091	HOUSING PLUG+SKTS,(SERVICE KIT)	1
	PLG4	131059	HOUSING PLUG+PINS,(SERVICE KIT)	1
		134201	STAND−OFF SUPPORT,PC CARD .312/.375W/POST&LOCK .43	4
14	CB1	183492	CIRCUIT BREAKER,MAN RESET 1P 10A 250V FRIC SNAPIN	1
15		097421	TERMINAL,PWR OUTPUT RED	1
16		097416	TERMINAL,PWR OUTPUT BLACK	1
17	C4,5	128750	CAPACITOR,CER DISC .1 UF 500 VDC W/TERMS	2
18		Fig 9-5	DRIVE ASSY,WIRE	1
19		107983	BLANK,SNAP−IN NYL .500 MTG HOLE BLACK	1
		199824	LABEL,WARNING ELECTRIC SHOCK AND PINCH POINTS	1
		172171	FTG,HOSE BRS BARBED COUPLER	1
		010493	BUSHING,SNAP−IN NYL .625 ID X .875 MTG HOLE	1

+When ordering a component originally displaying a precautionary label, the label should also be ordered.

To maintain the factory original performance of your equipment, use only Manufacturer's Suggested Replacement Parts. Model and serial number required when ordering parts from your local distributor.

☞ *Hardware is common and not available unless listed.*

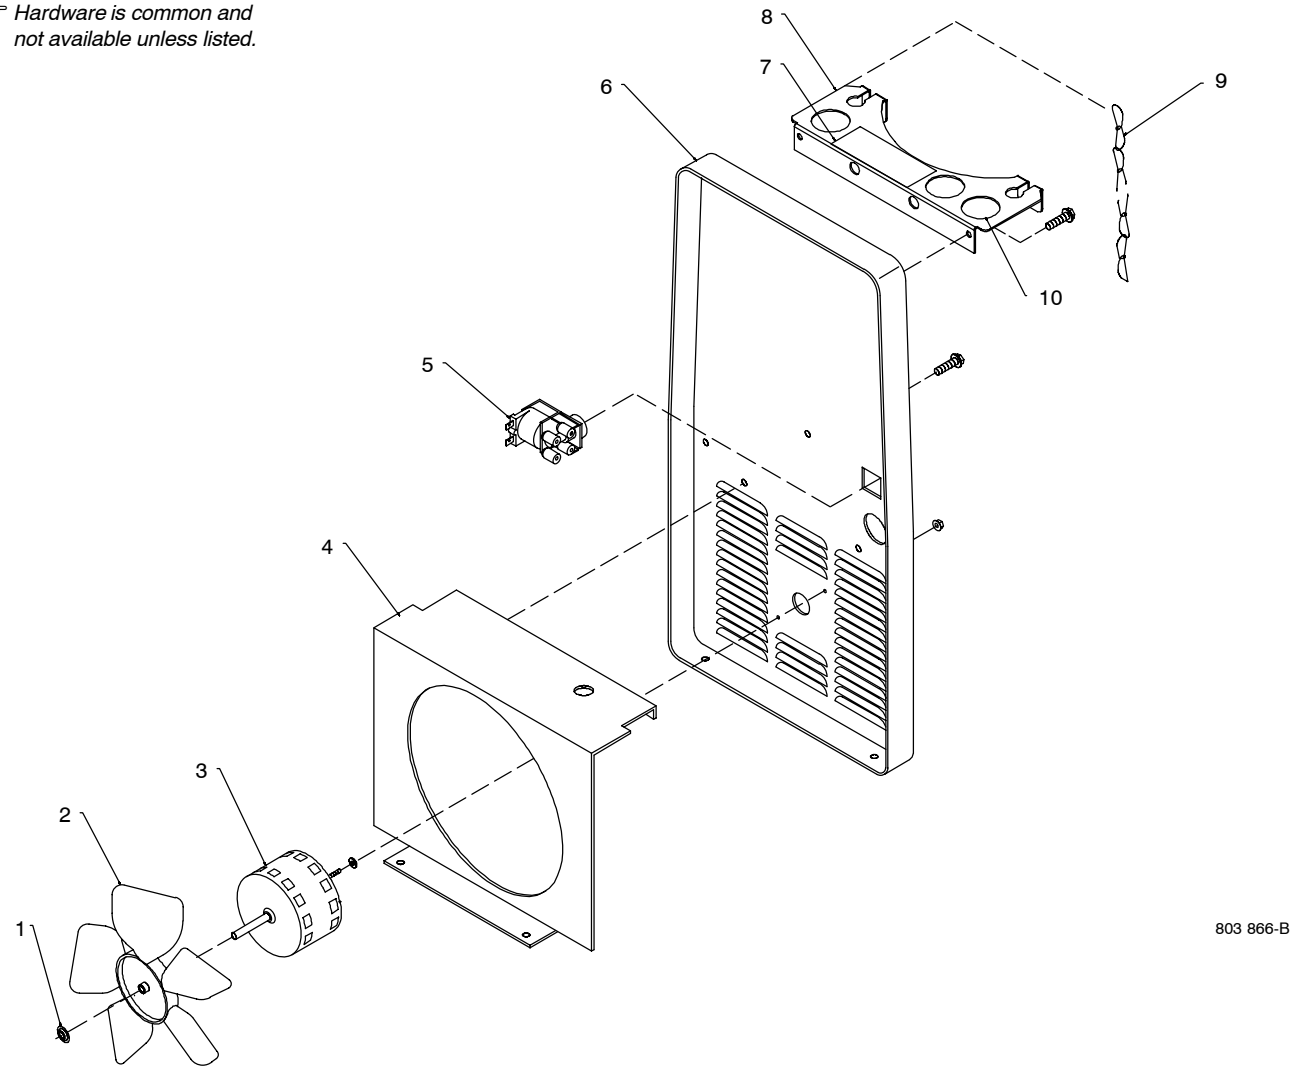

Figure 9-3. Panel, Rear w/Components

Item No.	Dia. Mkgs.	Part No.	Description	Quantity
			Figure 9-3. Panel, Rear w/Components (Fig 9-1 Item 2)	
1		049399	NUT, 312−18 PUSH ON .63D .07H STL	1
2		148809	BLADE,FAN 9.000 5WG 34DEG .312 BORE CCW PLSTC	1
3		188706	MOTOR,FAN 230V 50/60HZ 1550 RPM .312 DIA SHAFT	1
4		203711	WINDTUNNEL,9.000	1
5		216396	VALVE, 24VAC 2WAY CUSTOM PORT 1/8 ORF W/FRICT	1
6		203478	PANEL,REAR	1
7		200285	LABEL,WARNING CYLINDER MAY EXPLODE IF DAMAGED	1
8		+219818	BRACKET,BOTTLE RETAINER	1
9		188441	CHAIN,WELDLESS 2/0 X 31 LG	1
10		221072	GROMMET,RBR 1.312 ID X 1.562 MTG HOLE .125 GROOVE	3

☞ *Hardware is common and not available unless listed.*

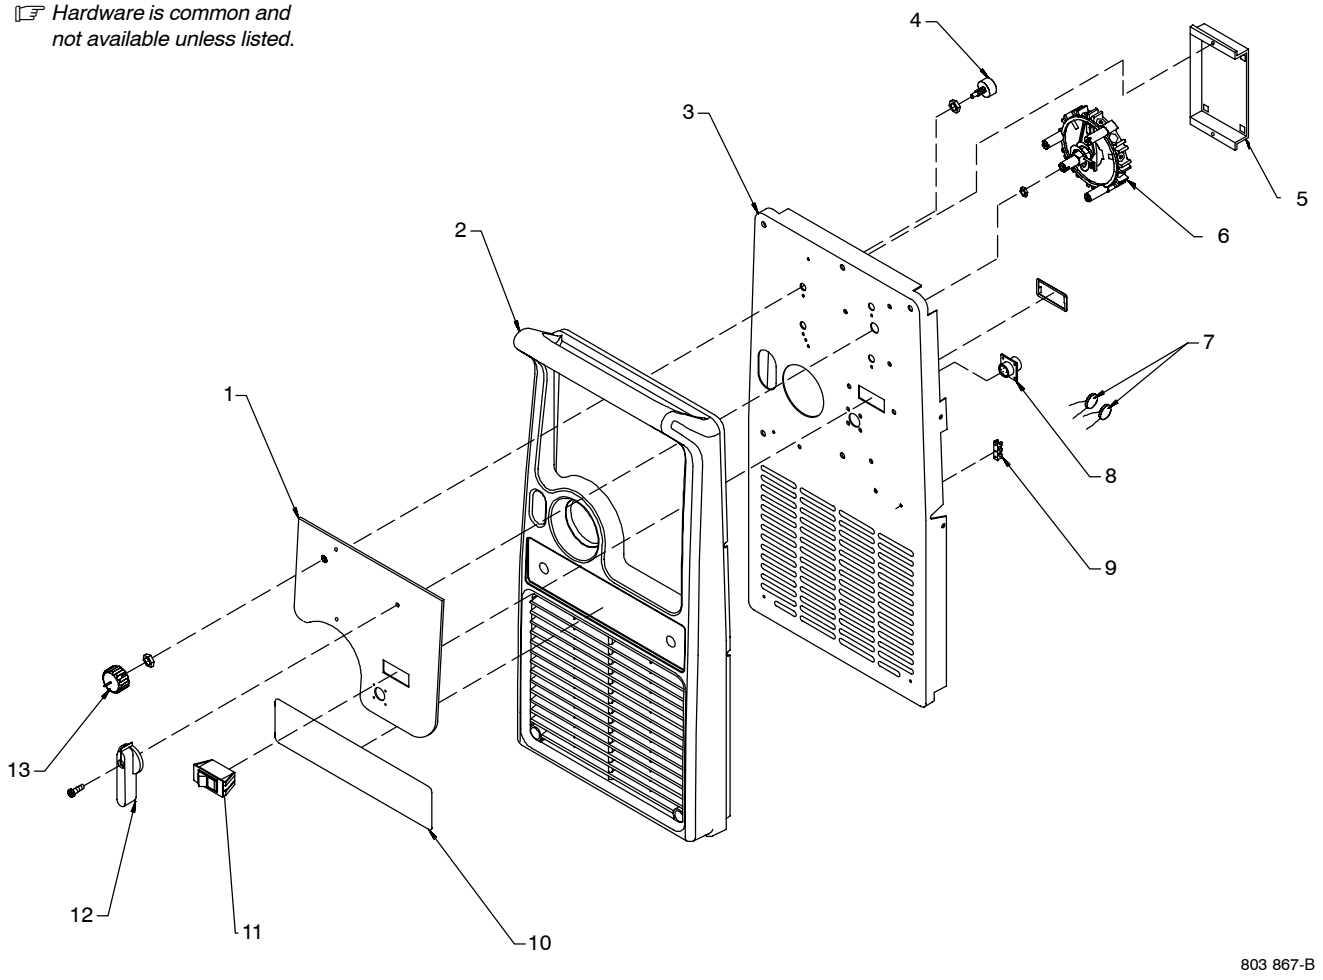

Figure 9-4. Panel, Front w/Components

Item No.	Dia. Mkgs.	Part No.	Description	Quantity

Figure 9-4. Panel, Front w/Components (Fig 9-1 Item 18)

... 1	.....	220079	.. LABEL,NAMEPLATE MILLERMATIC DVI	1
... 2	.....	208164	.. PANEL,FRONT BEZEL	1
... 3	.....	208165	.. PANEL,FRONT	1
... 4	.....	220968	.. POT ASSY,W/LEADS CP FLAT 1T .5 W 1K OHM(SING)	1
... 5	.....	196801	.. BRACKET,MTG	1
... 6	.... S2 ..	153197	.. SWITCH,SELECTOR 6 POSITION	1
.....	.....	136343	.. SCREW,K50X 20 PAN HD–PHL STL PLD PT THREAD FORMING	4
... 7	... C2,3 .	136735	.. CAPACITOR,CER DISC .1UF 500VDC STRIP	2
... 8	.....	048282	.. RECEPTACLE W/SOCKETS	2
... 9	.....	129524	.. TERM,FRICT 250X032 UNINSUL MALE .130 STUD MTG 3PR1	1
... 10	.....	208167	.. LABEL,LOGO	1
... 11	... CB2 ..	219552	.. CIRCUIT BREAKER,MAN RESET 2P 20A 250VAC	1
.....	.....	201553	.. CLIP,RETAINING CIRCUIT BREAKER	1
... 12	.....	207074	.. HANDLE,SWITCH	1
... 13	.....	207077	.. KNOB,POINTER 1.625 DIA PUSH ON	1

To maintain the factory original performance of your equipment, use only Manufacturer's Suggested Replacement Parts. Model and serial number required when ordering parts from your local distributor.

Item No.	Dia. Mkgs.	Part No.	Description	Quantity
		204857	**Figure 9-5. Wire Drive And Gears (Fig 9-2 Item 18)**	
1		602009	SCREW,.250-20 x 1.25 soc hd gr 8	1
2		172075	CARRIER,DRIVE ROLL W/COMPONENTS	1
3		166072	SPACER,GEAR	1
4		010224	PIN,SPRING CS .187 X 1.000	1
5		182788	HOUSING,ADAPTER GUN/FEEDER	1
6		085242	FASTENER,PINNED	1
7		085 244	WASHER, cupped stl .328 ID x .812 OD x .125 lip	1
8		196896	CUP,SPRING	1
9		196897	SPRING,CPRSN .695 OD X .095 WIRE	1
10		196895	KNOB,TENSION ADJ	1
11		166071	LEVER,MTG PRESSURE GEAR	1
12		204510	PIN,HINGE	1
13		151828	PIN,COTTER HAIR .054 X .750	1
14		173616	COVER,RIGHT ANGLE MOTOR	1
15		202888	MOTOR,GEAR 24VDC 122RPM 20:1 RATIO (INCLUDING)	1
		193633	KEY,WOODRUFF .118 X .380	1
		193634	WASHER,WAVE .405 ID X .740 OD	2
		193635	RING,RTNG EXT .394 SHAFT X	1
16		079633	FITTING,HOSE BRS BARBED M 3/16TBG	1
17		601966	SCREW,.375–16 X 1.25HEXHD	2
18		604538	WASHER,FLAT STL SAE .312	1
19		204585	KNOB	1
20		173619	CARRIER,DRIVE ROLL W/COMPONENTS	1
21		174609	SCREW,M 4–.7 x 12	1
22		174610	SCREW,M 6–1.0 X 20 SOC HD	3
23		192029	WASHER,FLAT .250 ID X .437 OD	3
24		173620	BUSHING,MOTOR MTG	3
25		602243	WASHER,FLAT .438 ID X 1.00 OD	1
26		602213	WASHER,LOCK .380 ID X .683 OD	1
		203526	ROLL,DRIVE V GROOVE .030/.035 COMB WIRE	2
		056192	GUIDE,WIRE INLET	1
		*045127	GUIDE,WIRE INLET ANTI–WEAR	1

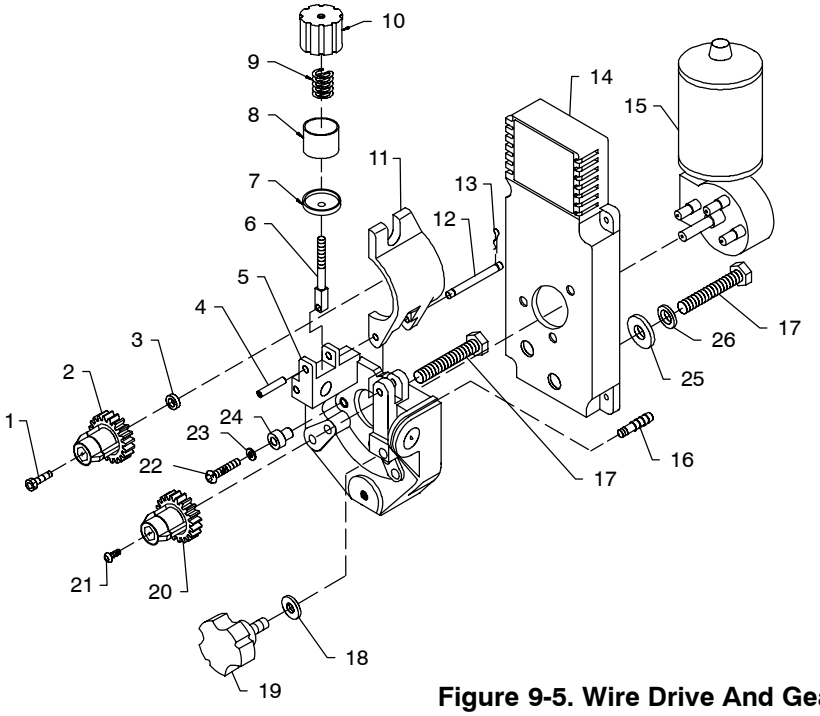

See Section 9-7 Drive Roll & Wire Guide Kits.

☞ *Hardware is common and not available unless listed.*

802 986-A

Figure 9-5. Wire Drive And Gears

*Recommended Spare Parts.

To maintain the factory original performance of your equipment, use only Manufacturer's Suggested Replacement Parts. Model and serial number required when ordering parts from your local distributor.

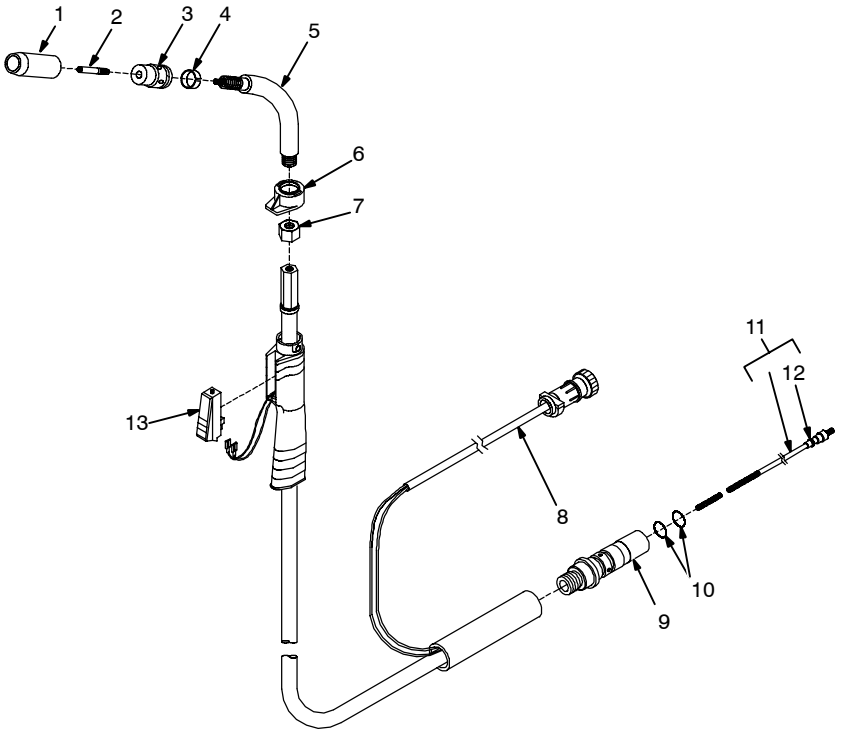

802 388-A / Ref. 800 792-C

Figure 9-6. M-10 Gun

Item No.	Part No.	Description	Quantity
		Figure 9-6. M-10 Gun (Fig 9-1 Item 19)	
1	169 715	NOZZLE, slip type .500 orf flush	1
2	♦087 299	TIP, contact scr .023 wire x 1.125	
2	♦000 067	TIP, contact scr .030 wire x 1.125	
2	♦000 068	TIP, contact scr .035 wire x 1.125	
3	169 716	ADAPTER, contact tip	1
4	170 470	RING, retaining	1
5	169 718	TUBE, head	1
6	169 738	NUT, locking handle	1
7	169 719	NUT, jam	1
8	180 433	CORD, trigger assembly	1
9	209 495	CONNECTOR, feeder	1
10	079 974	O-RING, .500 ID x .103CS rbr	2
11	♦194 010	LINER, monocoil .023/.025 wire x 15ft (including)	1
11	♦194 011	LINER, monocoil .030/.035 wire x 15ft (including)	1
12	079 975	O-RING, .187 ID x .103CS rbr	1
13	196 255	SWITCH, trigger	1

♦OPTIONAL

To maintain the factory original performance of your equipment, use only Manufacturer's Suggested Replacement Parts. Model and serial number required when ordering parts from your local distributor.

Item No.	Dia. Mkgs.	Part No.	Description	Quantity
		207 642	**Optional Spoolmate Spool Gun Switch**	
. . . . .		186420 . .	SWITCH ASSY	1
. . . . .		195539 . .	GAS DIVERTER VALVE	1
. . . . .		149332 . .	CLAMP,HOSE .405 – .485 CLP DIA SLFTTNG OLIVE DRA	2

To maintain the factory original performance of your equipment, use only Manufacturer's Suggested Replacement Parts. Model and serial number required when ordering parts from your local distributor.

9-7. Drive Roll And Wire Guide Kits

NOTE ☞

Base selection of drive rolls upon the following recommended usages:

1 *V-Grooved rolls for hard wire.*
2 *U-Grooved rolls for soft and soft shelled cored wires.*
3 *U-Cogged rolls for extremely soft shelled wires (usually hard surfacing types).*
4 *V-Knurled rolls for hard shelled cored wires.*
5 *Drive roll types may be mixed to suit particular requirements (e.g. V-Knurled roll in combination with U-Grooved).*

Wire Diameter			Kit No.	Drive Roll		Inlet Wire Guide
Fraction	Decimal	Metric		Part No.	Type	
.023/.025 in.	.023/.025 in.	0.6 mm	087 131	087 130	V-Grooved	056 192
.030/.035 in.	.030/.035 in.	0.8/0.9 mm	204 579	203 526	V-Grooved	056 192
.030 in.	.030 in.	0.8 mm	079 594	053 695	V-Grooved	056 192
.035 in.	.035 in.	0.9 mm	079 595	053 700	V-Grooved	056 192
						Ref. S-0026-B / 7-91

Warranty Questions?

Call
1-800-4-A-MILLER
for your local
Miller distributor.

Your distributor also gives you ...

Service
You always get the fast, reliable response you need. Most replacement parts can be in your hands in 24 hours.

Support
Need fast answers to the tough welding questions? Contact your distributor. The expertise of the distributor and Miller is there to help you, every step of the way.

Miller

TRUE BLUE® WARRANTY

Effective January 1, 2004
(Equipment with a serial number preface of "LE" or newer)

This limited warranty supersedes all previous Miller warranties and is exclusive with no other guarantees or warranties expressed or implied.

LIMITED WARRANTY – Subject to the terms and conditions below, Miller Electric Mfg. Co., Appleton, Wisconsin, warrants to its original retail purchaser that new Miller equipment sold after the effective date of this limited warranty is free of defects in material and workmanship at the time it is shipped by Miller. THIS WARRANTY IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS.

Within the warranty periods listed below, Miller will repair or replace any warranted parts or components that fail due to such defects in material or workmanship. Miller must be notified in writing within thirty (30) days of such defect or failure, at which time Miller will provide instructions on the warranty claim procedures to be followed.

Miller shall honor warranty claims on warranted equipment listed below in the event of such a failure within the warranty time periods. All warranty time periods start on the date that the equipment was delivered to the original retail purchaser, or one year after the equipment is sent to a North American distributor or eighteen months after the equipment is sent to an International distributor.

1. 5 Years Parts — 3 Years Labor
   * Original main power rectifiers
   * Inverters (input and output rectifiers only)
2. 3 Years — Parts and Labor
   * Transformer/Rectifier Power Sources
   * Plasma Arc Cutting Power Sources
   * Semi-Automatic and Automatic Wire Feeders
   * Inverter Power Sources (Unless Otherwise Stated)
   * Water Coolant Systems (Integrated)
   * Intellitig
   * Maxstar 150
   * Engine Driven Welding Generators **(NOTE: Engines are warranted separately by the engine manufacturer.)**
3. 1 Year — Parts and Labor Unless Specified
   * DS-2 Wire Feeder
   * Motor Driven Guns (w/exception of Spoolmate Spoolguns)
   * Process Controllers
   * Positioners and Controllers
   * Automatic Motion Devices
   * RFCS Foot Controls
   * Induction Heating Power Sources and Coolers
   * Water Coolant Systems (Non-Integrated)
   * Flowgauge and Flowmeter Regulators (No Labor)
   * HF Units
   * Grids
   * Maxstar 85, 140
   * Spot Welders
   * Load Banks
   * Arc Stud Power Sources & Arc Stud Guns
   * Racks
   * Running Gear/Trailers
   * Plasma Cutting Torches (except APT & SAF Models)
   * Field Options (NOTE: Field options are covered under True Blue® for the remaining warranty period of the product they are installed in, or for a minimum of one year — whichever is greater.)
4. 6 Months — Batteries
5. 90 Days — Parts
   * MIG Guns/TIG Torches
   * Induction Heating Coils and Blankets
   * APT & SAF Model Plasma Cutting Torches
   * Remote Controls
   * Accessory Kits
   * Replacement Parts (No labor)
   * Spoolmate Spoolguns
   * Canvas Covers

Miller's True Blue® Limited Warranty shall not apply to:

1. **Consumable components; such as contact tips, cutting nozzles, contactors, brushes, slip rings, relays or parts that fail due to normal wear. (Exception: brushes, slip rings, and relays are covered on Bobcat, Trailblazer, and Legend models.)**
2. Items furnished by Miller, but manufactured by others, such as engines or trade accessories. These items are covered by the manufacturer's warranty, if any.
3. Equipment that has been modified by any party other than Miller, or equipment that has been improperly installed, improperly operated or misused based upon industry standards, or equipment which has not had reasonable and necessary maintenance, or equipment which has been used for operation outside of the specifications for the equipment.

MILLER PRODUCTS ARE INTENDED FOR PURCHASE AND USE BY COMMERCIAL/INDUSTRIAL USERS AND PERSONS TRAINED AND EXPERIENCED IN THE USE AND MAINTENANCE OF WELDING EQUIPMENT.

In the event of a warranty claim covered by this warranty, the exclusive remedies shall be, at Miller's option: (1) repair; or (2) replacement; or, where authorized in writing by Miller in appropriate cases, (3) the reasonable cost of repair or replacement at an authorized Miller service station; or (4) payment of or credit for the purchase price (less reasonable depreciation based upon actual use) upon return of the goods at customer's risk and expense. Miller's option of repair or replacement will be F.O.B., Factory at Appleton, Wisconsin, or F.O.B. at a Miller authorized service facility as determined by Miller. Therefore no compensation or reimbursement for transportation costs of any kind will be allowed.

TO THE EXTENT PERMITTED BY LAW, THE REMEDIES PROVIDED HEREIN ARE THE SOLE AND EXCLUSIVE REMEDIES. IN NO EVENT SHALL MILLER BE LIABLE FOR DIRECT, INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES (INCLUDING LOSS OF PROFIT), WHETHER BASED ON CONTRACT, TORT OR ANY OTHER LEGAL THEORY.

ANY EXPRESS WARRANTY NOT PROVIDED HEREIN AND ANY IMPLIED WARRANTY, GUARANTY OR REPRESENTATION AS TO PERFORMANCE, AND ANY REMEDY FOR BREACH OF CONTRACT TORT OR ANY OTHER LEGAL THEORY WHICH, BUT FOR THIS PROVISION, MIGHT ARISE BY IMPLICATION, OPERATION OF LAW, CUSTOM OF TRADE OR COURSE OF DEALING, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR PARTICULAR PURPOSE, WITH RESPECT TO ANY AND ALL EQUIPMENT FURNISHED BY MILLER IS EXCLUDED AND DISCLAIMED BY MILLER.

Some states in the U.S.A. do not allow limitations of how long an implied warranty lasts, or the exclusion of incidental, indirect, special or consequential damages, so the above limitation or exclusion may not apply to you. This warranty provides specific legal rights, and other rights may be available, but may vary from state to state.

In Canada, legislation in some provinces provides for certain additional warranties or remedies other than as stated herein, and to the extent that they may not be waived, the limitations and exclusions set out above may not apply. This Limited Warranty provides specific legal rights, and other rights may be available, but may vary from province to province.

Owner's Record

Please complete and retain with your personal records.

Model Name	Serial/Style Number
Purchase Date	(Date which equipment was delivered to original customer.)
Distributor	
Address	
City	
State	Zip

For Service

Call 1-800-4-A-Miller or see our website at www.MillerWelds.com to locate a DISTRIBUTOR or SERVICE AGENCY near you.

Always provide Model Name and Serial/Style Number.

Contact your Distributor for:	Welding Supplies and Consumables Options and Accessories Personal Safety Equipment Service and Repair Replacement Parts Training (Schools, Videos, Books) Technical Manuals (Servicing Information and Parts) Circuit Diagrams Welding Process Handbooks
Contact the Delivering Carrier to:	File a claim for loss or damage during shipment. For assistance in filing or settling claims, contact your distributor and/or equipment manufacturer's Transportation Department.

Miller Electric Mfg. Co.
An Illinois Tool Works Company
1635 West Spencer Street
Appleton, WI 54914 USA

International Headquarters–USA
USA Phone: 920-735-4505 Auto-Attended
USA & Canada FAX: 920-735-4134
International FAX: 920-735-4125

European Headquarters – United Kingdom
Phone: 44 (0) 1204-593493
FAX: 44 (0) 1204-598066

www.MillerWelds.com

PRINTED IN USA

© 2004 Miller Electric Mfg. Co. 1/04